

# PATENT COOPERATION TREATY

**PCT**

## NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

Commissioner  
US Department of Commerce  
United States Patent and Trademark  
Office, PCT  
2011 South Clark Place Room 524  
Arlington, VA 22202  
ETATS-UNIS D'AMERIQUE  
ETATS-UNIS D'AMERIQUE  
in its capacity as elected Office

<b>Date of mailing</b> (day/month/year) 26 October 2000 (26.10.00)	
<b>International application No.</b> PCT/AU00/00254	<b>Applicant's or agent's file reference</b> JSB:FP12539
<b>International filing date</b> (day/month/year) 24 March 2000 (24.03.00)	<b>Priority date</b> (day/month/year) 24 March 1999 (24.03.99)
<b>Applicant</b> WELCH, Barry, John et al	

1. The designated Office is hereby notified of its election made:

☒ in the demand filed with the International Preliminary Examining Authority on:  
11 October 2000 (11.10.00)

☐ in a notice effecting later election filed with the International Bureau on:

2. The election ☒ was

☐ was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

<b>The International Bureau of WIPO</b> 34, chemin des Colombettes 1211 Geneva 20, Switzerland Facsimile No.: (41-22) 740.14.35	<b>Authorized officer</b> F. Baechler Telephone No.: (41-22) 338.83.38
--	--

## INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference FP12539	<b>FOR FURTHER ACTION</b> See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416).	
International Application No. PCT/AU00/00254	International Filing Date (day/month/year) 24 March 2000	Priority Date (day/month/year) 24 March 1999
International Patent Classification (IPC) or national classification and IPC Int. Cl. <sup>7</sup> G01F 1/76 1/78 25/00		
Applicant COMALCO ALUMINIUM LIMITED et al		

- This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.
- This REPORT consists of a total of 3 sheets, including this cover sheet.  
☒ This report is also accompanied by ANNEXES, i.e., sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consist of a total of 2 sheet(s).

## 3. This report contains indications relating to the following items:

- |      |                                     |   |
|------|-------------------------------------|---|
| I    | <input checked="" type="checkbox"/> | Basis of the report   |
| II   | <input type="checkbox"/>            | Priority  |
| III  | <input type="checkbox"/>            | Non-establishment of opinion with regard to novelty, inventive step and industrial applicability  |
| IV   | <input type="checkbox"/>            | Lack of unity of invention  |
| V    | <input checked="" type="checkbox"/> | Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement |
| VI   | <input type="checkbox"/>            | Certain documents cited   |
| VII  | <input type="checkbox"/>            | Certain defects in the international application  |
| VIII | <input type="checkbox"/>            | Certain observations on the international application   |

Date of submission of the demand 11 October 2000	Date of completion of the report 12 February 2001
Name and mailing address of the IPEA/AU AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA E-mail address: pct@ipaaustralia.gov.au Facsimile No. (02) 6285 3929	Authorised Officer  <b>Ross Burdon</b> Telephone No. (02) 6283

**I. Basis of the report**

1. With regard to the **elements** of the international application:\*
- ☐ the international application as originally filed.
- ☒ the description, pages **1 - 27** as originally filed,  
pages filed with the demand,  
pages received on with the letter of
- ☒ the claims, pages **28, 29, 31, 33, 34** as originally filed,  
pages, as amended (together with any statement) under Article 19,  
pages, filed with the demand,  
pages **30, 32** received on **5 February 2001** with the letter of **5 February 2001**
- ☒ the drawings, pages **1/15 - 15/15** as originally filed,  
pages, filed with the demand,  
pages, received on with the letter of
- ☐ the sequence listing part of the description:  
pages, as originally filed  
pages, filed with the demand  
pages, received on with the letter of
2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.  
These elements were available or furnished to this Authority in the following language which is:
- ☐ the language of a translation furnished for the purposes of international search (under Rule 23.1(b)).
- ☐ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of the translation furnished for the purposes of international preliminary examination (under Rules 55.2 and/or 55.3).
3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, was on the basis of the sequence listing:
- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished
4. ☐ The amendments have resulted in the cancellation of:
- ☐ the description, pages
- ☐ the claims, Nos.
- ☐ the drawings, sheets/fig.
5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed, as indicated in the Supplemental Box (Rule 70.2(c)).\*\*

\* Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17).

\*\* Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report

**V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement****1. Statement**

Novelty (N)	Claims 1 - 36	YES
	Claims none	NO
Inventive step (IS)	Claims 1 - 36	YES
	Claims none	NO
Industrial applicability (IA)	Claims 1 - 36	YES
	Claims none	NO

**2. Citations and explanations (Rule 70.7)****Closest Prior Art:**

US 5 576 499 A  
GB 2 241 789 A  
DE 39 23 653 A  
DE 36 17 595 A  
EP 0 834 723 A  
WO 94/05980

**NOVELTY (N) & INVENTIVE STEP (IS)**

All the documents cited in the ISR were category A only. Therefore the claimed invention is not disclosed in any of these patent documents and hence all the claims are novel.

The claimed invention is not obvious in the light of any of the cited documents nor disclosed in any obvious combination, nor would the claimed invention be obvious to a person skilled in the art in the light of common general knowledge by itself or in combination with any of these documents.

of the outlet aperture in the chamber is occupied by flowable material.

12. The flow meter as claimed in claim 11 wherein the chamber includes a base which is inclined towards the outlet aperture.

13. The flow meter as claimed in claim 11 or claim 12 wherein the outlet aperture is one of a plurality of outlet apertures, and the base of the chamber is shaped to facilitate even distribution to each outlet aperture.

14. The flow meter as claimed in any one of claims 11 to 13 wherein the chamber further comprises outflow openings above the enclosed region of the chamber.

15. The flow meter as claimed in any one of claims 11 to 14 wherein the chamber includes an elongate slot.

16. The flow meter as claimed in claim 15 wherein the outlet aperture is constituted by the elongate slot.

17. The flow meter as claimed in claim 15 wherein the outlet aperture is spaced apart from the elongate slot.

18. The flow meter as claimed in claim 17 wherein the outlet aperture is at a lower end of the chamber and the elongate slot is spaced vertically above the outlet aperture.

19. The flow meter as claimed in any one of claims 11 to 18 wherein the outlet aperture is one of a plurality of outlet apertures.

20. A flow meter for calculating the flow rate of a flowable material including:

- (a) calculating the flow rate for a first flow rate setting of the flow control means;
  - (b) calculating the flow rate for a second flow rate setting of the flow control means; and
  - (c) calculating a flow rate versus flow control means setting expression.
25. The method as claimed in claim 24 wherein the flow rates for the first flow rate setting and the second flow rate setting are measured by the method defined in any one of claims 1 to 10.
26. The method as claimed in claim 24 or claim 25 wherein the first and second flow rate settings are the settings for flow rates towards the maximum and minimum ends of the flow rate range.
27. The method as claimed in any one of claims 24 to 26 wherein the flow rates at the first and second flow rate settings are calculated using the flow meter defined in any one of claims 20 to 23.
28. A method of monitoring a continuous feeding system for flowable materials which flow through a flow control means having a plurality of settings, said method comprising:
- (a) calibrating the rate at which flowable material is discharged to the flow control means to obtain a flow rate versus flow control means setting expression;
  - (b) setting the flow control means at the setting required to obtain a required flow rate as calculated by the flow rate versus



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(52) International Patent Classification 7 :

G01F 1/76, 1/78, 25/00

A1

(11) International Publication Number:

WO 00/57139

(43) International Publication Date:

28 September 2000 (28.09.00)

(21) International Application Number: PCT/AU00/00254

(22) International Filing Date: 24 March 2000 (24.03.00)

(30) Priority Data:

21347/99

24 March 1999 (24.03.99)

AU

(71) Applicants (for all designated States except US): COMALCO ALUMINIUM LIMITED [AU/AU]; 15th Floor, 12 Creek Street, Brisbane, Queensland 4000 (AU). AUCKLAND UNISERVICES LIMITED [NZ/NZ]; 58 Symonds Street, Auckland (NZ).

(72) Inventors; and

(75) Inventors/Applicants (for US only): WELCH, Barry, John [NZ/NZ]; 100 Coates Avenue, Orakei, Auckland (NZ). ANDREWS, Evan, William [NZ/AU]; Unit 4/62-64 Westbury Road, South Launceston, Tasmania 7250 (AU).


(74) Agent: GRIFFITH HACK; 509 St Kilda Road, Melbourne, Victoria 3004 (AU).

(81) Designated States: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

With international search report.

(54) Title: MEASURING AND CONTROLLING THE FLOW OF FLOWABLE MATERIALS

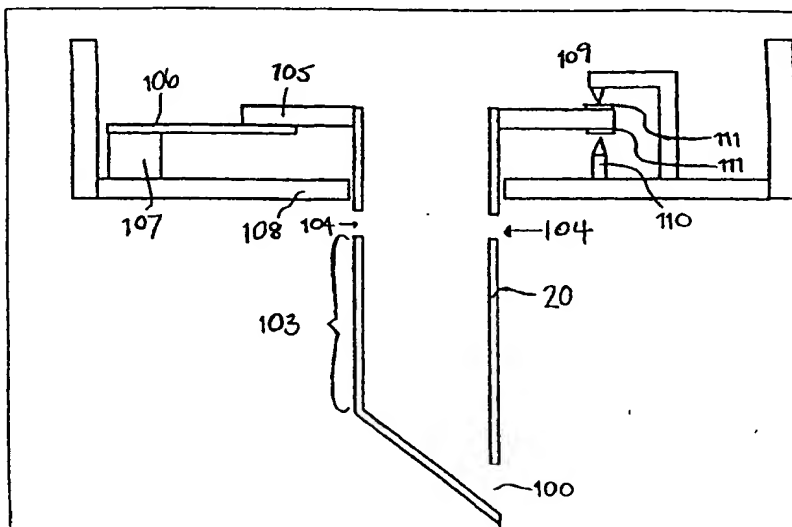

## (57) Abstract

A method of determining an inlet flow rate ( $F_{inlet}$ ) of a flowable material including passing an inlet stream of flowable material through a chamber (20) having an outlet aperture (100); measuring a first rate of change of quantity of material in the chamber (20) when the material is entering at said inlet flow rate; measuring a second rate of change of quantity of material in the chamber (20) when no material is entering the chamber (20); and calculating the inlet flow rate ( $F_{inlet}$ ) from said first and second rates, wherein both rate measurements are made while the whole of the outlet aperture (100) of the chamber (20) is occupied by the flowable material.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		



## MEASURING AND CONTROLLING THE FLOW OF FLOWABLE MATERIALS

The present invention relates to methods and apparatus for monitoring and controlling the flow of flowable materials such as sand, gravel, or liquids. In particular the present invention relates to a method for monitoring and calibrating continuous, semi-continuous or intermittent feeding systems for discharging granular or powdered free flowing materials at known mass feed rates.

As used herein, a flowable material is a material that can flow under the influence of gravity, including liquids such as water or syrup, and solids; substantially dry particulate materials such as sand, gravel, or alumina.

The aluminium industry has served as a stimulus for this work. The aluminium industry has matured in the period since the electrolytic reduction process was developed by Hall and Héroult in 1888. The method by which the alumina is fed to the melting cells is one particular area in which the industry has changed significantly. Changes in alumina feeding technology have been accelerated since 1960 when the size of cells increased above 100,000 amperes and environmental requirements associated with the growth of the industry meant that the cells have to be enclosed as much as possible. Mechanical automated systems have given way to point feeders where small amounts (in the range 0.5 to 3kg typically) of alumina are added through the crust of the cell utilising a hole that has been pierced by a crust-breaker. This has moved smelting from a semi-batch operation to a more continuous one.

Recent trends in the smelting industry for improving the energy efficiency and performance of the cells have resulted in the electrolyte being modified to compositions that result in lower solubility ranges for the added aluminium oxide. Therefore, even with the smaller

additions possible with point feeders, the process has a tendency to periodically or continuously form an aggregate or slurry of undissolved alumina and electrolyte that sinks to an inaccessible region below the liquid metal. This causes operating disturbances. A deficiency develops in the amount of alumina available, based on the assumed feed versus the actual additions. The energy efficiency also deteriorates because of the extra resistance generated by the material lying under the liquid metal cathode.

Studies of alumina dissolution have established that sludge formation is minimised when the alumina is added as slowly as possible thus suggesting continuous input will enable better cell performance. Accordingly, US patent 5476574 assigned to Comalco Aluminium Ltd discloses a continuous feeder for adding alumina to the electrolytic cell. The apparatus is based on controlling the cross-sectional area of an orifice through which the powder flows by means of a connected pneumatic linear positioner. The main disadvantage of this feeder is that it is insensitive to changes in the flow and physical properties of the alumina. There is no feedback information provided from the system that can either identify or self-correct changes such as in the properties of the alumina which alter the mass flow rate relationship and therefore reduce the potential benefits of continuous feeding.

All previous feeding systems have been based on volumetric measurements and these have limited accuracies because densities of particular materials can typically vary by 10%. While application of volumetric measurements to the continuous feeding of alumina has resulted in the potential for significant improvements in feeding accuracy, the feedback information is slow and thus the corrections not optimal. In particular its lack of sensitivity to blockages from out-of-range particulate material makes it desirable to incorporate a mass flow measurement system.

New Zealand patent 234570 assigned to DSIR Industrial Development describes a slot flow meter for measuring mass flow rates of solids. This device consists of a chamber with a closed base and one or more substantially vertical slots in its sides. Particulate solids are passed through the chamber in such a way that only part of the overall slot length is occupied by the flowable material (hence the term "open slot"). In this "open slot" arrangement, particulate solids or more generally flowable material introduced into the chamber will tend to flow out through the slots at a rate proportional to the height of solids in the slots. The mass feed rate indicated by a given height is dependent on particulate properties including bulk density. It is usually impractical to measure the height of flowing solids at the slots and therefore a mass sensing device is used to determine the mass of solids in the chamber. Theoretical relationships between the mass of solids in the chamber and the solid mass flow rate have been described, particularly in the transient filling and emptying modes.

One significant disadvantage of using this "open slot" method in some environments is that a very complex mass determination means is required to determine the mass of material in the flow meter. In particular, in the application of the method to the process of electrolytic reduction, the components of the mass measurement means must be able to withstand high temperatures, electromagnetic interference and radio frequency disturbances.

According to NZ 234570 and other publications on the slot flow meter, there is an approximately straight line relationship between mass of material in the chamber of the slot flow meter, and the height of material in the chamber. However, this relationship is only approximate, and outside

factors can result in significant discrepancies between the flow rate calculated by the slot flow meter and the actual flow rate. For example, at low flow rates, using currently known slot flow meters, the relationship is not directly proportional, and therefore there is some discrepancy between the flow rate calculated by the slot flow method and the actual flow rate.

Accordingly, it is desirable to have a second, reliable source of information to calibrate the slot flow meter, or alternatively, a different technique altogether which is not subject to the inaccuracies of the slot flow meter described above.

It is not a simple matter in environments such as the environment in which the alumina reduction process is carried out to set up a second system for accurately recording the flow of material. There is often a very limited space between the storage vessel and the melting cell in which to place the equipment. In addition, any equipment installed must be able to withstand high temperatures, electromagnetic interference and radio frequency disturbances.

If a different technique is desired altogether this system would also need to include components which are able to withstand the above conditions. Optical strain gauge transducers can be used to measure the mass of material in the slot meter system under these conditions, however they are complex and expensive, costing the region of \$7,000 to \$10,000. An alternative mass measurement means costing less money would be desirable in a new system.

The known slot flow meter system requires no prior knowledge of the material being dispensed. However, if the flow properties of the material change significantly, then the expression between mass and solid mass flow rate may

also change. Such changes are known to frequently occur in alumina through segregation, particle size distribution variations, and other parameters. This results in calibration limitations in the system which limit accuracy at low flow rates. Accordingly an object of the present invention is to provide a method for calibrating the flow meter, or a different method for determining mass flow rate.

It is an object of this invention to provide an improved method and apparatus for measuring and controlling the discharge of flowable material, or at least to provide the public with a useful choice.

According to the present invention there is provided a method of determining an inlet flow rate ( $F_{inlet}$ ) of a flowable material including:

- (a) passing an inlet stream of flowable material through a chamber having an outlet aperture to one end thereof;
- (b) measuring a first rate of change of quantity of material in the chamber when the material is entering at said inlet flow rate;
- (c) measuring a second rate of change of quantity of material in the chamber when no material is entering the chamber; and
- (d) calculating the inlet flow rate  $F_{inlet}$  from said first and second rates;

wherein steps (c) and (d) are conducted whilst the whole of the outlet aperture in the chamber is occupied by the flowable material.

In contrast to the "open slot" arrangement, a "closed aperture" or "closed slot" flow pattern is produced when the whole of the aperture or slot is occupied by the flow of material. In other words, the level of flowable material in the chamber must be above the uppermost point of the or each outlet (drain) aperture in the chamber when conducting steps (b) and (c). A closed aperture or closed slot flow rate is approximately constant so that the rate at which solids flow or drain out of an opening can be estimated from the slope of the mass-time drainage curve.

It has been found by the applicant of the present invention that a relatively simple "two-point mass measurement" technique can be used to measure an inlet flow rate of flowable material, and that this simple technique can be utilised in a calibration system in order to provide a simple method for calibrating a continuous feeding system. In a preferred embodiment of the invention the method of determining an inlet flow rate of flowable material utilises simple and inexpensive components, which can withstand the high temperatures, electromagnetic interference and radio frequency disturbances to which the components will be exposed in preferred applications of this technique, such as in the process of electrolytic reduction of alumina.

In contrast to known slot-flow meters, this preferred flow meter of the present invention includes:

a chamber through which the flowable material can pass, the chamber including an outlet aperture at a lower end thereof and a wall defining an enclosed region above said outlet aperture,

wherein the dimensions of the wall are such that flow rates can be measured whilst the whole of the outlet aperture in the chamber is occupied by flowable material.

The slot flow meter of the present invention may be either a modified version of the slot flow meter of NZ 234570 , or may be a flow meter having no vertical elongate slot feature.

In contrast to known slot flow meters, both types of flow meter of the present invention include a wall defining an enclosed region above the outlet aperture having dimensions which are great enough to enable the flow rate to be measured whilst the whole of the outlet aperture in the chamber is occupied by flowable material (ie. a "closed region" or a "closed aperture" region). Such flow meters can therefore be operated in such a way that the flowable material passing into the meter will flow under "closed slot" meter principles.

It is to be noted that the "closed aperture" flow meter of the present invention may include an open slot region for operating the meter using known open-slot principles. However, it has hitherto been unknown to provide such meters with a "closed aperture" or "closed slot" region and to calibrate the meter by reference to a closed aperture calibration sequence. Specifically, the closed slot meter theory can be utilised to calibrate the flow meter, and thereafter the actual flow rate measured by the open slot flow rate determination method can be compared to the flow rate expected at the given flow setting.

According to an alternative embodiment of the invention, the flow meter does not have an "open slot" feature. With reference to this particularly preferred embodiment of the invention, it has been found by the applicant that by combining this closed slot flow meter with simple measurement means it is possible to obtain a flow meter for calculating the solids mass flow rate of a flowable material (on an intermittent basis) which is relatively

very inexpensive to install and is relatively robust in the harsh operating conditions that may be experienced in the electrolytic reduction process. Therefore a number of disadvantages associated with open slot meters can be avoided.

One principal disadvantage in the application of the known slot-flow meter to aluminium smelting applications which is avoided concerns the need in such applications to measure a wide range of feed rates. For instance, for a 170kA cell having 4 feeders (each provided with a flow meter) under normal operating conditions each feeder supplies alumina at a rate of 5-9g/s. However, in the event of an anode effect (where it is necessary to feed alumina into the cell as quickly as possible) the flow rate required is 35 g/s or more. The complete range of 0-40 g/s is difficult to measure accurately at both low and high flow rates in the known slot flow meter. As explained above, at low flow rates the slot flow meter is not extremely accurate.

The flow meter developed by the present application also has the advantage over the known slot-flow meter in that the outlet aperture can be sized to permit passage of oversized material. In contrast, known slot flow meters require a relatively narrow slot region.

In addition, since the flow meter of the present invention does not require a relatively long open slot region, the height of the unit can be reduced. The height of the components used in a flow meter in some environments can be critical in determining whether the flow meter is suitable for a particular application. Accordingly this is a significant advantage of the flow meter of one preferred embodiment of the invention over known slot flow meters.

For instance, in the case of the aluminium smelting industry, a number of flow meters are used at a number of



feeding points to feed alumina into one cell. Each feeder (and therefore each flow meter) used must have the capacity to feed larger than average quantities of alumina into the cell in the event that one or more of the other feeders fails. Hence, for an open slot meter, twice the normal operating level of slot capacity is required. This corresponds to an open slot meter with an increased slot height, if the same mass versus mass flow rate resolution is required. Alternatively, if there is not enough space for the increased chamber height required, and a wider slot is used, resolution is compromised.

The chamber of the flow meter of the present invention may include one or more outlet apertures. In the case of a plurality of outlet apertures, the base of the chamber is shaped so as to facilitate even distribution to each outlet aperture.

Preferably, the chamber of the flow meter also includes outflow openings above the enclosed region of the chamber. The outflow openings enable overflow levels of flowable material to pass through the flow meter.

In the case where the flow meter of the present invention includes an elongate slot, the elongate slot may constitute the outlet aperture, or may be present in addition to the outlet aperture.

In the case where the elongate slot is present in addition to the outlet aperture, the outlet aperture is preferably sized to permit passage of oversized material that cannot exit the chamber of the flow meter through the elongate slot. It is also preferred that the outlet aperture be spaced apart from the elongate slot. Whilst it is not necessary for the outlet aperture and the elongate slot to be vertically aligned, in a preferred embodiment the elongate slot is spaced vertically above the outlet

aperture.

According to one preferred embodiment of the invention, the chamber of the flow meter does not include an elongate slot of the type that enables the flow of material through the meter to be calculated using open slot meter calculations. According to this preferred embodiment of the invention, the chamber through which the flowable material can pass has an outlet aperture at a lower end thereof of a cross section that enables flowable material to drain from the chamber at a rate less than the minimum flow rate to be measured.

As will be explained in further detail below, the flow meter having a chamber of this configuration enables a simple two mass point calculation to be utilised to determine the flow rate of flowable material passing through the chamber.

Preferably, the flow meter includes measurement means for measuring the time taken for the mass of flowable material in the meter to pass from a first mass to a second mass. Any known means may be used to detect when the mass has passed from a first mass to a second mass.

This can be detected by recording any measurable quantity that varies proportionally to the mass of material. For example:

actual mass could be measured,

the height of material in the flow meter could be measured and converted into a mass measurement,

the pressure transducer output voltage in a pressure bellows could be measured and corresponding mass calculated;

the capacitance in a parallel plate capacitor fitted to the outlet slot of the weighing chamber could be measured and a mass calculated therefrom; or

5

the chamber walls could be configured to constitute a parallel plate capacitor and a mass calculated from the capacitance measured therefrom.

10

Preferably, the measurement means includes a displacement means enabling the chamber to move between a first position at a first mass of flowable materials present in the chamber and a second position when a second mass of material is present in the chamber, and timing means (including, for example, an electrical circuit) by means of which the time taken for the chamber to move between said first and second positions is measured. The displacement means may be of any suitable configurations and may for example include a beam such as a carbon fibre beam or a biasing means such as spring. As explained above, it is preferred that the measurement means detects movement between two discrete positions corresponding to the first and second masses only.

25

According to the present invention there is provided a method for calibrating the rate at which flowable material is discharged from a storage vessel through a flow control means, said flow control means having a plurality of settings controlling the rate of flow of flowable material discharged from the storage vessel over a flow rate range between minimum and maximum flow rates corresponding to minimum and maximum flow rate settings, the method including:

35

- (a) calculating the flow rate for a first flow rate setting of the flow control means;

(b) calculating the flow rate for a second flow rate setting of the flow control means; and

5 (c) calculating a flow rate versus flow control means setting expression.

Preferably the flow rates for the first and second flow rate settings are determined by the method described in  
10 general above.

Preferably the flow control means includes a flow control valve.

15 The flow control valve may be of any suitable configuration. Without wishing to limit the scope of the invention, according to a preferred embodiment of the invention the flow control valve may comprise a plate having a variable shaped orifice. By changing the position  
20 or the setting of the valve relative to an outflow point of the storage vessel, the size of the opening and hence the solids mass flow rate will be caused to change.

Preferably, the method for calibrating the rate at which  
25 flowable material is discharged from the storage vessel through the flow control valve involves calculating the flow rate at a flow rate setting which corresponds to the maximum flow rate and the minimum flow rate.

30 Preferably, these flow rates are determined using the methods described in general above.

According to the present invention there is also provided a method of monitoring a continuous feeding system for  
35 flowable materials which flow through a flow control means having a plurality of settings, said method comprising:

- 13 -

- 5
- (a) calibrating the rate at which flowable material is discharged to the flow control means to obtain a flow rate versus flow control means setting expression;
- (b) setting the flow control means at the setting required to obtain a required flow rate as calculated by the flow rate versus flow control means setting expression; and
- 10
- (c) re-calibrating the rate at which flowable material is discharged through the flow control means to obtain a re-calibrated flow rate versus flow control means setting expression.
- 15

Preferably the re-calibration step is conducted when a precondition is met. Depending on the particular flow rate determining method in use in the system, the precondition

20 may be one of a number of events. For example, the precondition may be that a pre-set time period has elapsed since the last calibration or re-calibration was conducted. Alternatively, the precondition may be based on a certain flow rate measurement reading taken by a second flow rate

25 determining method (eg. the slot flow meter method). Another alternative is when the measuring signal changes outside pre-determined limits thus signifying a change in property of the material that may influence its mass flow rate.

30 According to one embodiment of the invention, the precondition is one of the following:

- 35
- (i) that the flow rate required has changed and the previous flow rate was the maximum flow rate; and

- 14 -

- (ii) that the flow rate required has changed, the new flow rate required is not the maximum flow rate, the setting of the flow control means is changed to correspond to the new flow rate required, the flow rate at the new flow control means setting is calculated, and the new flow rate calculated is not within a tolerance range of the flow rate expected at the new flow control means setting.

According to an alternative embodiment of the invention, the precondition may be that the discharge flow rate at a given flow control means setting measured by a second flow rate determining method is not within a tolerance range of the flow rate expected at the given flow control means setting.

The invention will now be described in further detail by reference to the accompanying drawings in which:

FIGURE 1: shows the preferred form of experimental apparatus of the invention;

FIGURE 2: is a cross-sectional side view of one flow meter of the invention;

FIGURE 3: is a cross-sectional schematic side of one preferred flow meter of the invention;

FIGURE 4: is a schematic diagram of an example rotary type feed control system;

FIGURE 5. is an example feed control slider and rotating disc aperture shapes;

FIGURE 6: shows two cross-sections of one preferred

form the flow meter illustrated in Figure 3;

FIGURE 7: shows two cross-sections of an alternative  
form of the flow meter of the present  
invention;

FIGURE 8: illustrates the method for measuring an  
inlet flow rate according to a preferred  
embodiment of the invention;

FIGURE 9: illustrates closed slot calibration trial  
results using the flow meter illustrated in  
Figure 6;

FIGURE 10: illustrates the closed slot calibration  
trial accuracy results;

FIGURE 11: is a block diagram of an example diagnostics  
algorithm for the method using the flow  
meter illustrated in Figure 7;

FIGURE 12: is a schematic graph of the calibration  
sequence results obtained using the flow  
meter of Figure 7;

FIGURE 13: is a block diagram of an example diagnostics  
algorithm for the method using the flow  
meter illustrated in Figure 6;

FIGURE 14: is a schematic graph of the calibration  
sequence results obtained using the flow  
meter of Figure 6; and

FIGURE 15: is a graph of the setting of the preferred  
feed control slider illustrated in Figure 5  
against flow rate.

By way of illustrative example and without limiting the scope or extent of this invention, the feeding system of this invention is herein applied to the continuous or semi-continuous feeding of alumina to an electrolytic cell for production of aluminium by the Hall Héroult process. The invention results in the desired degree of precision - at least in laboratory trials. The cell itself, having a large capacity, is capable of averaging out fluctuations in instantaneous flow that are caused by the diagnostic procedures carrying out self-checks from time to time.

The invention is an integrated system of continuously, semi-continuously or intermittently feeding powders and/or granular materials or the like in a manner such that the mass feed rate can be computed and re-calibration can occur through a short flow interrupt sequence.

In principle the invention includes three interfaced modules that are controlled by an appropriate logic system.

The first module is a storage vessel or feed hopper with a flow control means at its base. The flow control means (or flow control valve) includes either a mechanical discharge device such as pinch valve, belt, rotary or screw type feeder or an adjustable discharge aperture, which is the preferred mechanism. The adjustable aperture is positioned by an appropriate positioning means which can switch between several different apertures, or alternatively a continuously variable opening. The positioning means may for example consist of a sliding or rotating type actuator. This feed control mechanism also incorporates an off position.

Referring to Figures 1, 2, 3, 4 and 8 reference number 1 indicates a hopper for holding a supply of material 2 which discharges from the hopper through bottom aperture 3. In Figures 2 and 4 only, a portion of the hopper is shown.



Material is discharged at pre-set rates from the feed hopper via a feed control means. By way of example and without intending to limit the scope of this invention, the feed control means may comprise either an adjustable discharge aperture, located above or below bottom aperture 3, or an appropriate mechanical discharge device incorporated into the base of the hopper, such as a pinch valve, belt, rotary or screw-type feeder.

The adjustable discharge aperture may incorporate by way of example any sliding, rotating or flow restricting mechanism for positioning several different sized apertures or altering the size, shape or effectiveness of a single aperture at the hopper's outlet.

The preferred feed control means incorporates a sliding control valve 4 with differently sized flow control apertures 5 spaced along its length: see Figures 4 and 5.

The flow control apertures are located at known intervals along the sliding control valves length. Controlled movement by the positioning means allows discharge of material at discrete flow rates, depending on the aperture's flow characteristics for a given material. Use of a continuously variable opening 39, along the slider's length, as shown in Figure 5, would result in a range of possible flow rates. The sliding control valve is positioned beneath the feed hopper in housing 13. This housing has a passage 14 that is aligned directly below the hopper's bottom aperture 3. Thus if one of the flow control apertures 5, see Figure 2, is aligned between the bottom aperture and the housing passage, material will flow from the hopper.

By way of example and without intending to limit the scope of this invention, roller ball bearings 12 may be fixed at regular intervals along the housing's length to provide

drag free movement of the sliding control valve in a horizontal plane beneath the hopper. These ball bearings may also be used to maintain the control valves position relative to the hoppers bottom apertures such that there is minimal clearance with the flow control holes, hence preventing leakage. In applications, for example where the metered material is non-abrasive and enhances free movement of the sliding valve it may be more advantageous to replace, if not omit, the ball bearing rollers for some alternative mechanism.

Six flow control apertures are shown in Figures 4 and 5. The number of apertures or type of opening configuration selected depends on the intended application. By way of example, six flow control apertures could be used when continuously supplying alumina to an electrolytic cell for production of aluminium by electrolysis of alumina dissolved in a molten electrolyte. Apertures could be used to under-feed and over-feed alumina at rates above and below the standard or desired feed rate, in a ratio which gives the correct flow over time. The largest aperture is capable of discharging alumina at a nominal 500% of the average required feed rate. This aperture is required to discharge alumina in the event of an anode effect. Alternatively, use of a continuously variable opening would provide the feeding system with a range of possible feed rates, with similar valve movements. As is illustrated in Figure 15, the flow rate measured in an experiment is directly proportional to the position of the slot 29 relative to the upper outlet orifice 114 for this type of valve.

An example of a rotary disc feed control valve is detailed in Figure 4. Rotational movement of the disc 40 about its central axis 41, in a parallel orientation with respect to the base of the hopper, enables apertures or variable openings to be aligned at the outlet point of the hopper,

thus controlling the flow of material into the metering device. Use of a continuously variable opening 39 instead of a series of apertures spaced on the outer axis of the disc would result in a range of flow rates as opposed to discrete rates. Application of a rotary control valve is expected to be more favourable, being easier to maintain. A rotary control valve would also be favourable in situations where a compact unit is required due to space limitations.

If an abrasive feed stock, such as alumina, is to be in direct contact with key valve components it is preferable that these components be made of an appropriate wear-resistant material. Furthermore, it is preferable that these parts are easily replaceable.

Movement of any feed control orifice system is actuated by an appropriate positioning means. By way of example, the positioning means may incorporate any pneumatic or electric, rotary, linear or screw type actuators which may or may not have any feedback capability.

The preferred positioning means for the sliding valve feed control means comprises a computer controlled pneumatically or electrically driven linear actuator 6. A remote cable 8 may be used to place the actuator away from a hostile environment, as shown in Figure 1. The actuator includes a linear resistive transducer (not shown) to determine the position of the sliding control valve. This system is able to position the control valve within 1mm of its set point. The linear actuator may be linked via a remote cable 8 with couplings 7 to the slider control valve when operating in hazardous operating environments which may degrade the performance of the linear actuator or in situations where space is limited. The remote cable has a flexible internal core 9 that moves independently of the external sheath when clamped 10. Thus, the linear actuator does not need to be in the same plane as the sliding control valve.

The positioning means for the rotary valve assembly as shown in Figure 4 would require either a rotary actuator attached to the central pivot point 41 of the disc or  
5 alternatively a linear actuator connected at the circumference of the disc.

With reference to Figure 2, flowing particulate material that discharges through the feed control means can either  
10 be fed directly into the metering chamber 20 or passed through any suitable screening arrangement such as an inclined self cleaning screen 16. Figure 4 demonstrates use of the slot flow meter with no pre-feed screen device.

15 A preferred embodiment of the invention illustrated in Figures 3, 6 and 8, the outlet aperture 100 of the chamber 20 is sized to permit passage of oversized material. Indeed, it is a significant advantage of the present invention that the chamber enables oversized material to  
20 pass through without effecting the calibration of the feed system or the mass flow calculation.

The flow meter of one preferred embodiment of the present invention illustrated in Figures 3, 6 and 8 includes a  
25 chamber 20 through which flowable material (in particular alumina) can pass, the chamber 20 including an outlet aperture 100 at a lower end thereof, and a wall 102 defining an enclosed region (or a "closed slot" region) above the outlet aperture 100. The chamber also includes  
30 two outflow openings 104 above the enclosed region 23 of the chamber 20.

The chamber illustrated in Figures 3 and 8 includes one outlet opening. In an alternative embodiment illustrated  
35 in Figure 6, the chamber 20 includes two outlet openings toward (or more specifically at) it's lower end. The base of the chamber illustrated in Figure 6 is inclined at a 45

degree angle towards each of the two outlet openings 100. This configuration of the base of the chamber facilitates even distribution of flowable material to each of the outlet apertures.

5

Referring to Figure 3, the measurement means of a preferred embodiment of the invention is illustrated. This system involves the use of measuring the mass of solids in the weighing chamber 20 at two discrete levels corresponding to the closed slot region of the flow meter.

10

The chamber 20 of the flow meter is positioned inside chamber housing 105 which is in turn coupled to a carbon fibre beam 106. The carbon fibre beam 106 is supported by an end support 107 which keeps the carbon fibre beam in a spaced apart relationship to the flow meter housing 108.

15

The spring beam arrangement illustrated in Figure 3 is pre-loaded by a known mass  $m_1$ .

20

The mass measurement means also includes upper and lower contact terminals 109 and 110. A voltage is supplied across the terminals 109 and 110. The region of the chamber housing 105 that comes into contact with the terminals 109 and 110 is insulated by insulating plates 111. With reference to Figure 8, the operation of this on/off contact arrangement is demonstrated for a chamber 20 being filled with solids.

25

The upper terminal is in electrical contact with the insulating plate 111 on top of the chamber housing 105 when the chamber is empty. This is due to the pre-loading of the spring beam arrangement as described above. Physical contact between terminal 109 and plate 111 is only broken when the mass of solids inside the chamber 20 exceeds  $m_1$ . Electrical contact between the lower terminal 110 and lower plate 111 occurs when the mass of solids inside the chamber

30

35

20 is greater than, or equal to, mass  $m_2$ . Accordingly by recording only the output state for each of the terminals 109 and 110 it is possible to determine the time at which electrical contact is made and lost. This information is all that is required to calibrate the flow meter.

One alternative to this system is to provide an optical sensor to measure the location of the chamber at one of two positions corresponding to the two masses of material ( $m_1$  and  $m_2$ ) in the chamber. Such an optical detector system may for example include a beam of light which is blocked by the chamber when the chamber lowers below a point (corresponding to  $m_1$  being present in the chamber) and another beam of light which is blocked when the chamber lowers below a point corresponding to  $m_2$ . This arrangement has the advantage of avoiding corrosion contact between the contact terminals 109 and 110 and the plates 111.

#### METER CALIBRATION

For the flow meter of the preferred embodiment of the invention illustrated in Figures 3, 4 and 6, the following method is used for calibration using the two mass point determining mechanism described above.

Figure 9 illustrates the closed aperture calibration trial for an incoming alumina primary flow rate of 5.1 g/s. It is to be noted that the Figure illustrates the 4 points obtained using the calibration method of the present invention, as well as on-line mass data obtained by another technique for comparison purposes. The information generated illustrates the fact that the filling and emptying curves in the closed aperture region of the flow meter are almost linear and therefore can be approximated by a straight line between two points.

On-line mass data was only recorded between the limits of

90.5 g and 131.5g because the spring movement of the chamber 20 was restricted by the upper and lower contact points of the mass measurement system. These contact point limits correspond to the closed aperture calibration masses  $m_1$  and  $m_2$ , respectively.

The incoming flow rate of solids into the chamber 20 can be determined from the slope of the filling curve added to the absolute slope of the discharge curve between  $m_1$  and  $m_2$ . Hence, by filling and emptying the chamber of solids from  $m_1$  to  $m_2$  and then  $m_2$  to  $m_1$  and measuring the time taken to pass between each mass level, it is possible to calculate the incoming flow rate of solids in a straightforward manner.

The filling and emptying flow rates were calculated using Equations 1 and 2, respectively,

$$F_{fill} = (m_2 - m_1) / (t_2 - t_1) \quad \text{Equation 1.}$$

$$F_{empty} = (m_1 - m_2) / (t_4 - t_3) \quad \text{Equation. 2}$$

$F_{empty}$  is negative (slope of the graph is negative) and is always so since  $m_2 > m_1$ . Therefore,

$$\text{absolute } (F_{empty}) = (m_2 - m_1) / (t_4 - t_3).$$

The incoming flow rate of alumina into the meter was calculated using Equation 3.

$$\begin{aligned} F_{inlet} &= F_{fill} - F_{empty} \\ &= F_{fill} + \text{absolute } (F_{empty}) \\ &= (m_2 - m_1) \{ [1 / (t_2 - t_1)] + [1 / (t_4 - t_3)] \} \end{aligned}$$

Equation 3

Using the closed aperture calibration approach in

conjunction with the two-point mass measurement mechanism, the incoming flow rate of primary alumina and a 60/40 wt% mix of primary alumina / iron sand were estimated to within +/-6% of their actual values. These results, shown in

5 Figure 10, demonstrate that the flow metering system of the present invention is independent of:

- material property factors,
- and the incoming flow rate.

10 It can also be inferred that this system operates independently of meter blockages, because the closed slot calibration approach is based on the filling and emptying curves. Consequently if blockage occurs, both the curves are affected equally and thus the net effect of the  
15 disturbances is cancelled.

Using the flow rate measurement technique set out above, the closed aperture type flow meter can be calibrated.

20 The sliding valve 4 having a continuously variable opening 39 illustrated in Figure 5 was used in this technique.

The valve 4 was set to position B and the time taken for the mass to rise from  $m_1$  to  $m_2$  was measured. The valve was  
25 then set to position D (so that the flow of material into the chamber 20 was interrupted) and the time taken for the mass to lower from  $m_2$  to  $m_1$  was measured. The Flow rate for the valve at position B (corresponding to a maximum flow rate outside the anode effect flow rate) was  
30 calculated using Equation 3. The same procedure was repeated for the valve at position C (corresponding to a minimum flow rate outside the "off" position D). From these two measurements, a flow rate versus valve (flow control means) setting expression was calculated.

35

The closed aperture calibration method can also be used to calibrate a modified slot flow meter having a closed



aperture region above the slot of a sufficient size for the closed slot calibration technique to be conducted before the slot is "opened".

5 Figure 12 illustrates a chamber 20 which is suitable for use in this embodiment of the invention. The chamber includes two closed aperture regions 103. The upper region 103a is large enough for the closed aperture calibration method to be conducted before the level of material in the  
10 chamber falls below point 113.

In contrast to the embodiment illustrated in Figures 9 and 14, the mass of the chamber for this embodiment is not measured using the simple two-point mass determination  
15 means described in detail above. Instead, a more complex system of the type used in open slot flow rate determination methods is used. This mass determination means calculates the actual mass of the material in the chamber 20.

20 At the start of the calibration procedure, the chamber 20 is filled with the flowable material (by opening the sliding valve 4 to position A) to a level above the open slot region 102. On interruption or cessation of the flow  
25 of material into the chamber, the mass of the solids in the chamber decreases as the material drains from the slot and the outlet aperture 100. The time interval ( $t_6 - t_5$ ) for the mass of material flowing out to the chamber 20 to pass from an arbitrary mass  $m_5$  to a second arbitrary mass  $m_6$  is  
30 measured and the flow rate  $F_{empty}$  (again, a negative figure since the second mass is less than the first ) is calculated.

The valve is then set at valve position C and the time  
35 interval  $t_8 - t_7$  for the mass of material to pass from another arbitrary mass  $m_7$  to another arbitrary mass  $m_8$  is measured, and the flow rate  $F_{fill}$  is calculated. This value

is also negative, as indicated by the slope of the graph.

The mass flow rate for the inlet of material at setting C is calculated by:

5

$$\begin{aligned} F_{\text{inlet}} &= F_{\text{fill}} - F_{\text{empty}} \quad (\text{where } F_{\text{fill}} \text{ and } F_{\text{empty}} \text{ are negative}) \\ &= \text{absolute}(F_{\text{empty}}) - \text{absolute}(F_{\text{fill}}) \end{aligned}$$

10

The same procedure is repeated for valve position B (ie. the flow rate  $F_{\text{fill}}$  at valve position B is determined and the flow rate  $F_{\text{inlet}}$  at valve position B is calculated from this and the flow rate  $F_{\text{empty}}$ ). From these two flow rates, a flow rate versus valve position setting calibration expression is calculated.

15

#### MONITORING A CONTINUOUS FEEDING SYSTEM

20

The two calibration techniques of the two alternative embodiments of the invention described above can be used to monitor and control a continuous or semi-continuous method for feeding flowable materials into, for example, an electrolytic reduction cell.

25

Using the chamber of the embodiment illustrated in Figures 7 and 12, the control strategy set out in Figure 11 can be used.

30

Using the chamber of the embodiment illustrated in Figures 3, 6 and 7 the control strategy set out in Figure 13 can be used.

35

It will be clear that the aluminium smelter application referred to is but one of many uses of a controllable source of solid particulate material. For example the invention could be applied to the preparation of wet concrete in a readymix concrete plant or at a large construction site, or it could be applied in the

manufacture of fertiliser for farming, where different mixtures of superphosphate, lime, and the like are mixed according to individual needs. The liquid flow monitoring aspect could be applicable in the food industry where  
5 viscous solutions such as syrups are dispensed, but it could also dispense foodstuffs such as peas.

It will be understood that various alterations and modifications may be made to the methods and apparatus  
10 described above without departing from the scope of this invention.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A method of determining an inlet flow rate ( $F_{inlet}$ ) of a flowable material including:

5

(a) passing an inlet stream of flowable material through a chamber having an outlet aperture to one end thereof;

10

(b) measuring a first rate of change of quantity of material in the chamber when the material is entering at said inlet flow rate;

15

(c) measuring a second rate of change of quantity of material in the chamber when no material is entering the chamber; and

20

(d) calculating the inlet flow rate  $F_{inlet}$  from said first and second rates;

wherein steps (c) and (d) are conducted whilst the whole of the outlet aperture in the chamber is occupied by the flowable material.

25

2. The method as claimed in claim 1 wherein the outlet aperture has a cross-sectional area such that, in use, flowable material flows from said outlet aperture at a rate less than the minimum flow rate to be measured.

30

3. The method as claimed in claim 2 wherein the first rate of change is calculated by measuring the time interval for the mass of material to pass from a first mass  $m_1$  to a second mass  $m_2$ , and the second rate of change is calculated by measuring the time interval for the mass of material to pass from a third mass  $m_3$  to a fourth mass  $m_4$ .

35

4. The method as claimed in claim 3 wherein the fourth

mass is equal to the first mass ( $m_4 = m_1$ ) and the third mass is equal to the second mass ( $m_3 = m_2$ ).

5. The method as claimed in anyone of claims 2 to 4  
5 wherein step (b) is conducted prior to step (c).

6. The method as claimed in any one of claims 2 to 5  
wherein the outlet aperture is one of a plurality of outlet  
apertures and the sum of cross sectional areas of said  
10 outlet apertures is less than the minimum flow rate to be  
measured.

7. The method as claimed as claimed in claim 1 wherein  
the chamber includes an elongate slot.  
15

8. The method as claimed in claim 7 wherein the  
dimensions of the elongate slot are such that the flow rate  
of flowable material can be calculated at a different time  
interval to the time interval of steps (b) and (c) by an  
20 open slot method.

9. The method as claimed in claim 7 or claim 8 wherein  
the outlet aperture is spaced apart from the elongate slot.

25 10. The method as claimed in claim 9 wherein the  
chamber is elongate in an upright orientation and the  
elongate slot is longitudinally spaced apart from the  
outlet aperture.

30 11. A flow meter for use in the method according to any  
one of claims 1 to 10, including:

a chamber through which the flowable material can  
pass, the chamber including an outlet aperture at a lower  
35 end thereof and a wall defining an enclosed region above  
said outlet aperture, wherein the dimensions of the wall  
are such that flow rates can be measured whilst the whole

of the outlet aperture in the chamber is occupied by flowable material.

12. The flow meter as claimed in claim 11 wherein the chamber includes a base which is inclined towards the outlet aperture.

13. The flow meter as claimed in claim 11 or claim 12 wherein the outlet aperture is one of a plurality of outlet apertures, and the base of the chamber is shaped to facilitate even distribution to each outlet aperture.

14. The flow meter as claimed in any one of claims 11 to 13 wherein the chamber further comprises outflow openings above the enclosed region of the chamber.

15. The flow meter as claimed in any one of claims 11 to 14 wherein the chamber includes an elongate slot.

16. The flow meter as claimed in claim 15 wherein the outlet aperture is constituted by the elongate slot.

17. The flow meter as claimed in claim 15 wherein the outlet aperture is spaced apart from the elongate slot.

18. The flow meter as claimed in claim 17 wherein the outlet aperture is at a lower end of the chamber and the elongate slot is spaced vertically above the outlet aperture.

19. The flow meter as claimed in any one of claims 11 to 18 wherein the outlet aperture is one of a plurality of outlet apertures.

20. A flow meter for calculating the flow rate of a flowable material including:

a chamber through which the flowable material can pass, the chamber having an outlet aperture at a lower end thereof of a cross section that enables flowable material to drain from the chamber at a rate less than the minimum flow rate to be measured.

21. The flow meter as claimed in any one of claims 11 to 20 including measurement means for measuring the time taken for the mass of flowable material in the meter to pass from a first mass to a second mass.

22. The flow meter as claimed in claim 21 wherein the measurement means includes:

displacement means enabling the chamber to move between a first position when a first mass of flowable material is present in the chamber and a second position when a second mass of material is present in the chamber, and

timing means by means of which the time taken for the chamber to move between said first and second positions is measured.

23. The flow meter as claimed in claim 22 wherein the measurement means detects movement between two discrete positions corresponding to the first mass and the second mass only.

24. A method for calibrating the rate at which flowable material is discharged from a storage vessel through a flow control means, said flow control means having a plurality of settings controlling the rate of flow of flowable material discharged from the storage vessel over a flow rate range, the method including:

- 32 -

- (a) calculating the flow rate for a first flow rate setting of the flow control means;
  - (b) calculating the flow rate for a second flow rate setting of the flow control means; and
  - (c) calculating a flow rate versus flow control means setting expression.
25. The method as claimed in claim 24 wherein the flow rates for the first flow rate setting and the second flow rate setting are measured by the method defined in any one of claims 1 to 10.
26. The method as claimed in claim 24 or claim 25 wherein the first and second flow rate settings are the settings for flow rates towards the maximum and minimum ends of the flow rate range.
27. The method as claimed in any one of claims 24 to 26 wherein the flow rates at the first and second flow rate settings are calculated using the flow meter defined in any one of claims 20 to 23.
28. A method of monitoring a continuous feeding system for flowable materials which flow through a flow control means having a plurality of settings, said method comprising:
- (a) calibrating the rate at which flowable material is discharged to the flow control means to obtain a flow rate versus flow control means setting expression;
  - (b) setting the flow control means at the setting required to obtain a required flow rate as calculated by the flow rate versus



flow control means setting expression; and

- (c) re-calibrating the rate at which flowable material is discharged through the flow control means to obtain a re-calibrated flow rate versus flow control means setting expression.

29. The method as claimed in claim 28 wherein the re-calibration step is conducted when a precondition is met.

30. The method as claimed in claim 29 wherein the precondition is one of the following:

- (i) that the feed rate required has changed and the previous flow rate was the maximum flow rate; and
- (ii) that the flow rate required has changed, the new flow rate required is not the maximum flow rate, the setting of the flow control means is changed to correspond to the new flow rate required, the flow rate at the new flow control means setting is calculated, and the new flow rate calculated is not within a tolerance range of the flow rate expected at the new flow control means setting.

31. The method as claimed in claim 29 wherein the precondition is:

- (i) that the discharge flow rate at a given flow control means setting measured by a second flow rate determining method is not within a tolerance range of the flow rate expected at the given flow control means setting.

32. The method as claimed in any one of claims 28 to 31 wherein the calibration and re-calibration steps are conducted by the method according to any one of claims 24 to 31.

33. A method of measuring an inlet flow rate of a flowable material substantially as herein described with reference to the examples.

10

34. A flow meter substantially as herein described with reference to the accompanying drawings.

35. A method for calibrating the rate at which flowable material is discharged from a storage vessel through a flow control valve substantially as herein described with reference to the accompanying drawings.

15

36. A method of monitoring a continuous feeding system for flowable materials substantially as herein described with reference to the accompanying drawings.

20

25

09/937351

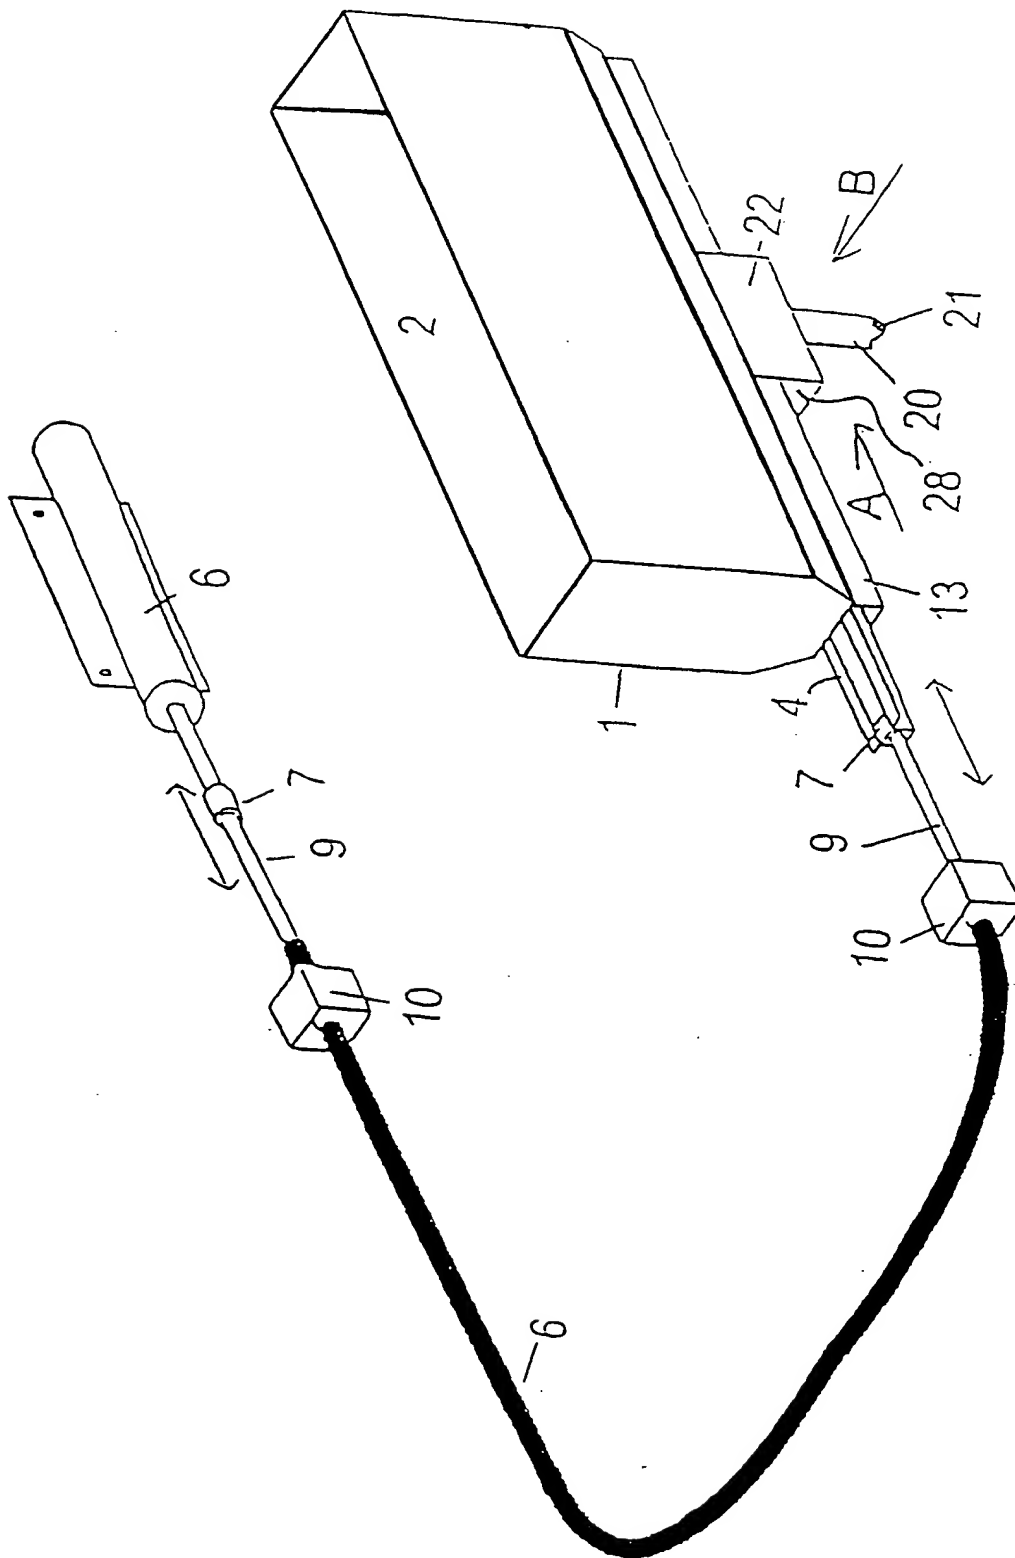


FIGURE 1

09/937351

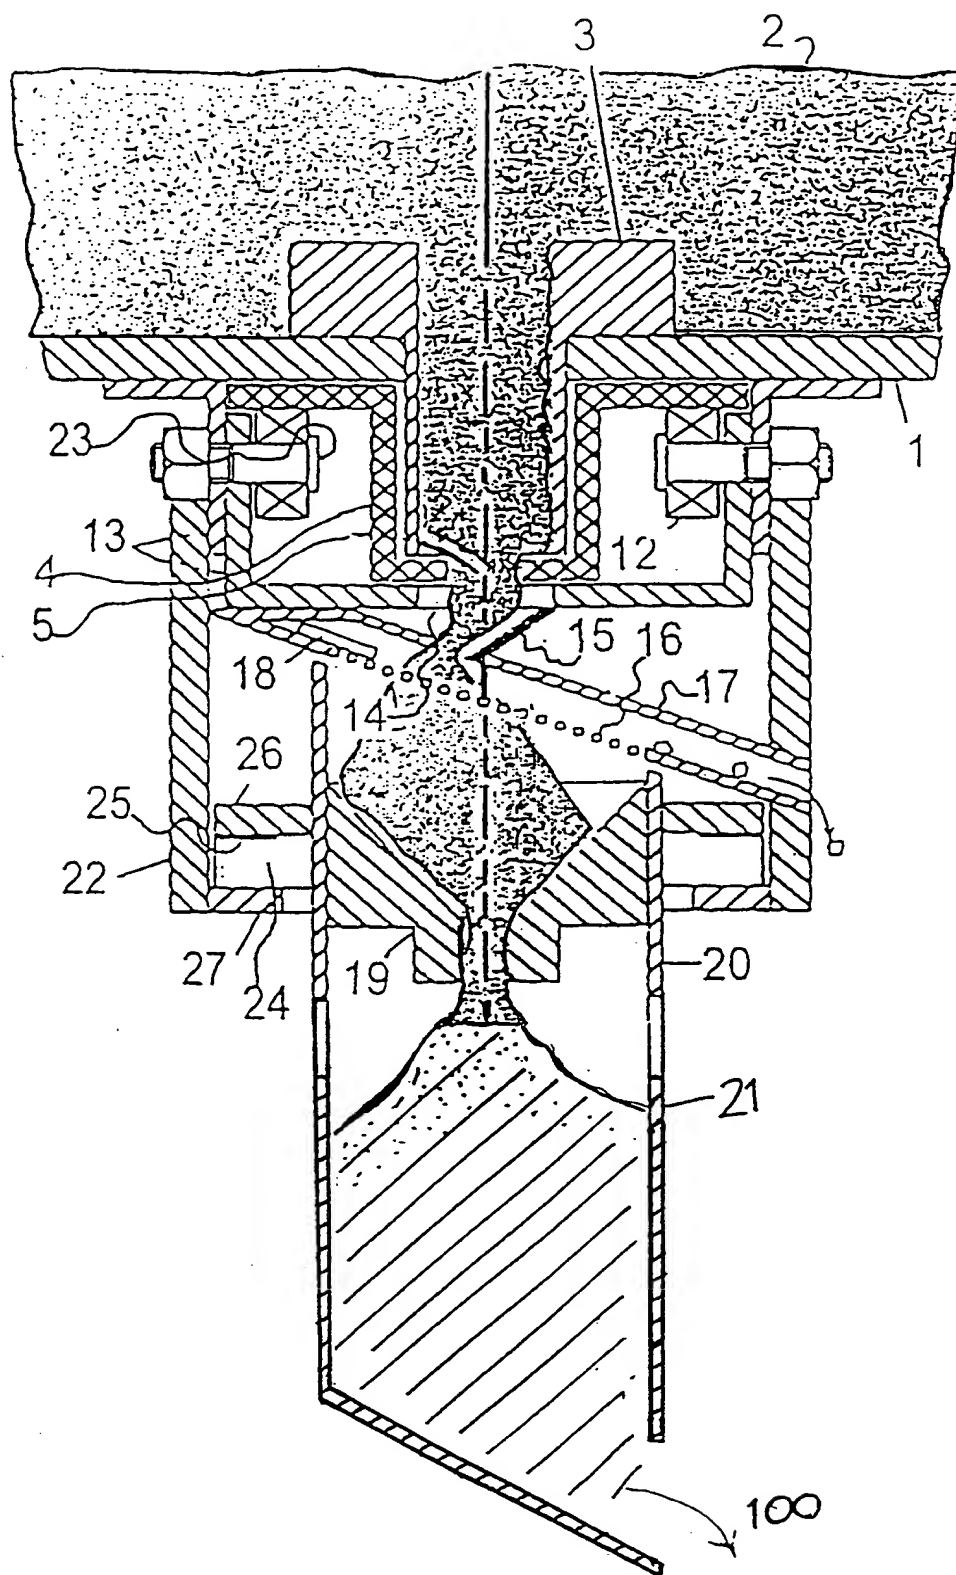



FIGURE 2



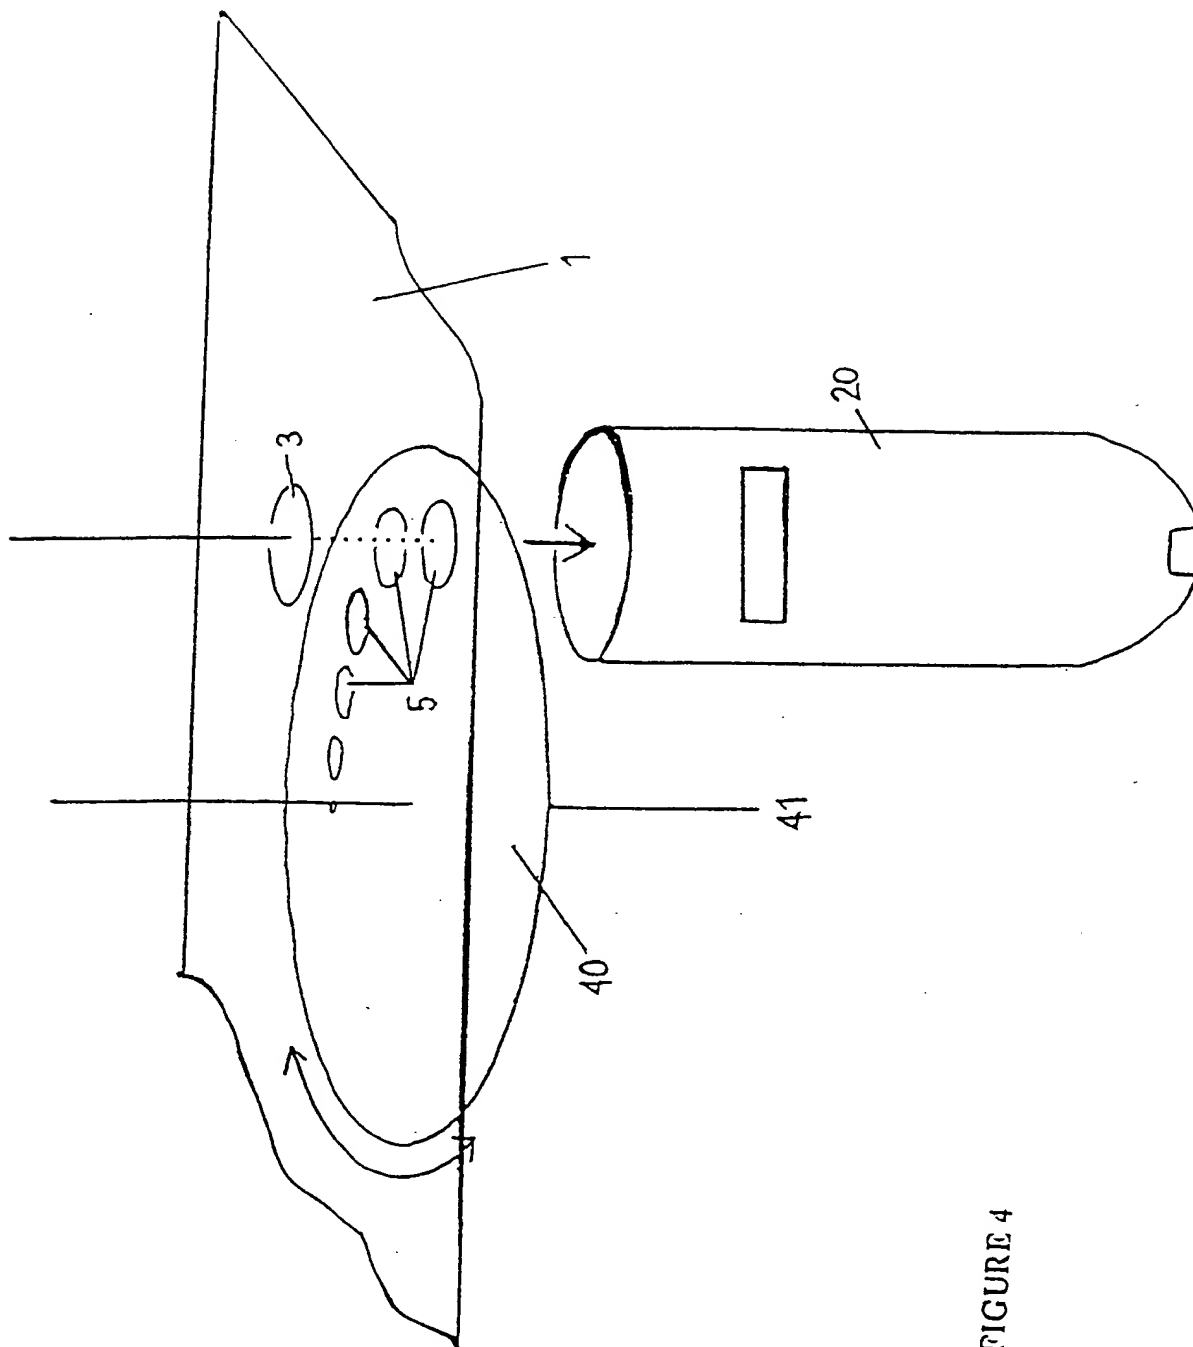


FIGURE 4

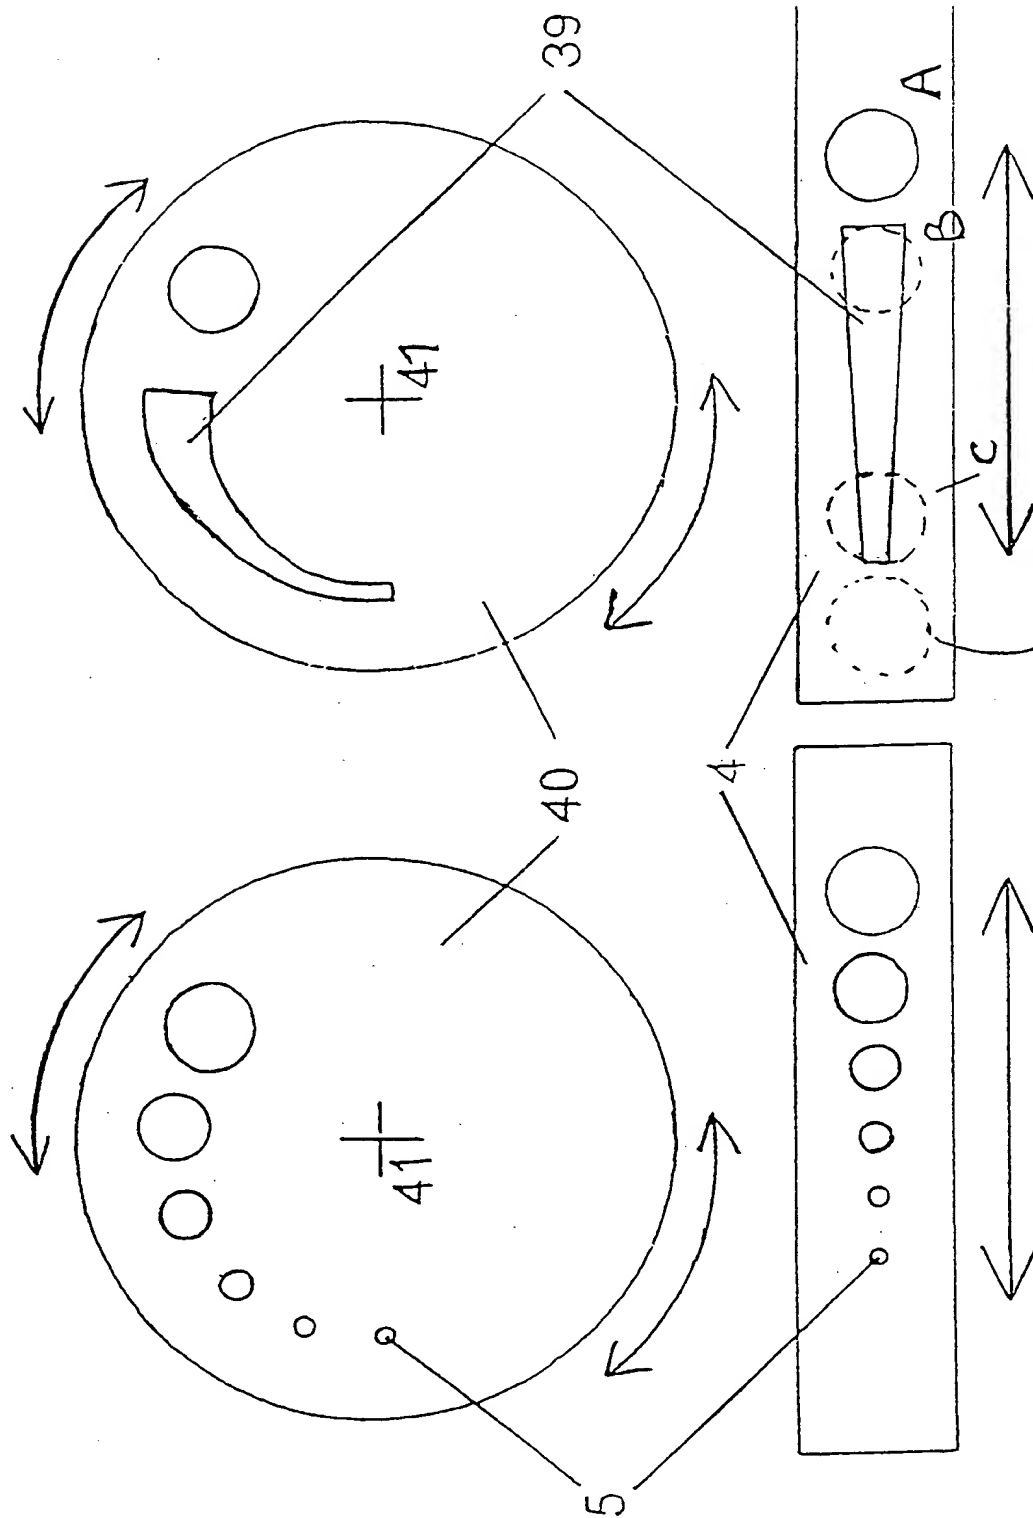


FIGURE 5

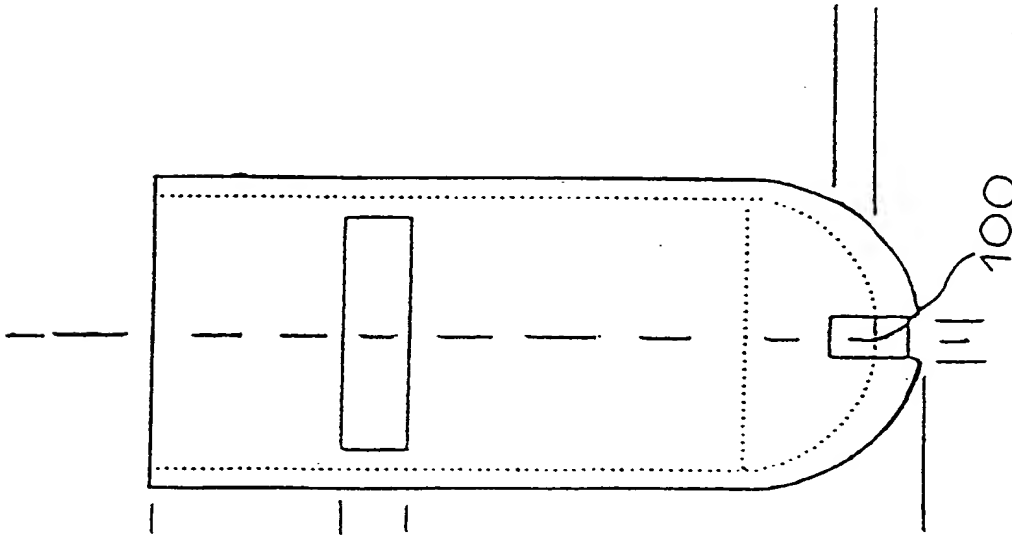
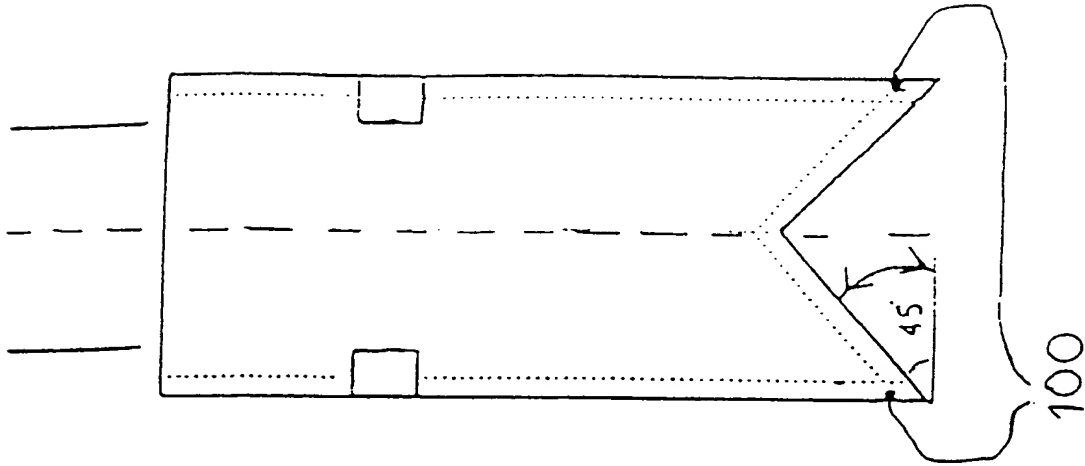


FIGURE 6



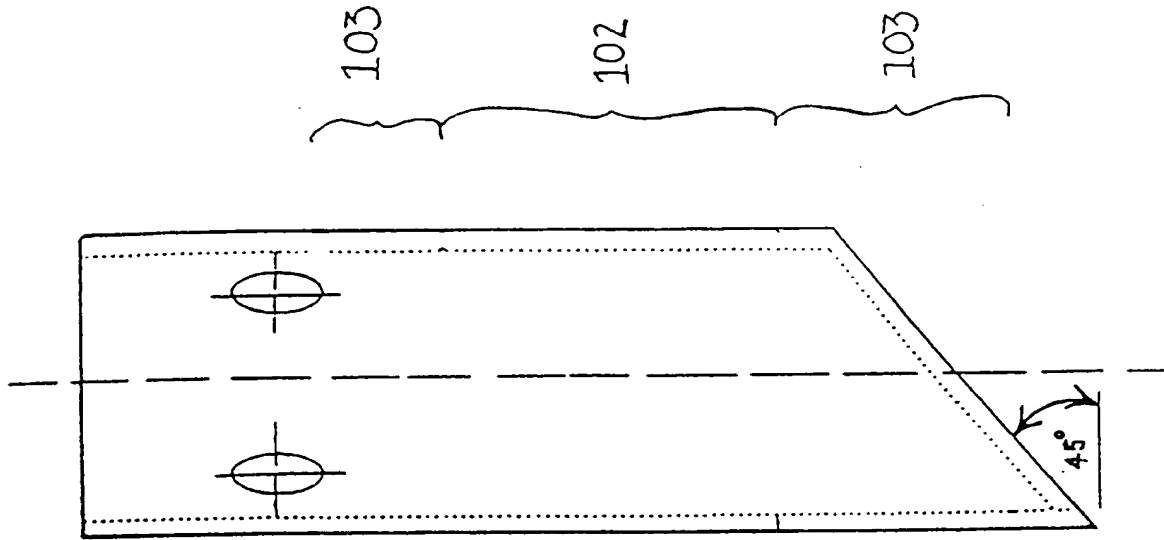
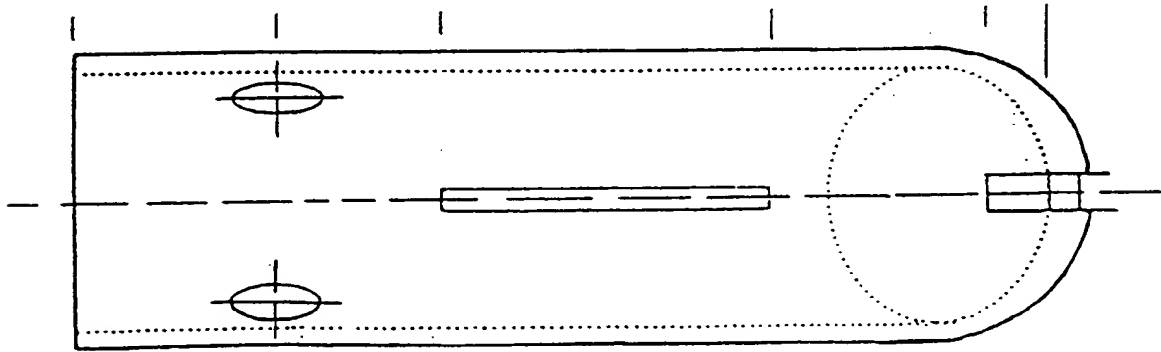
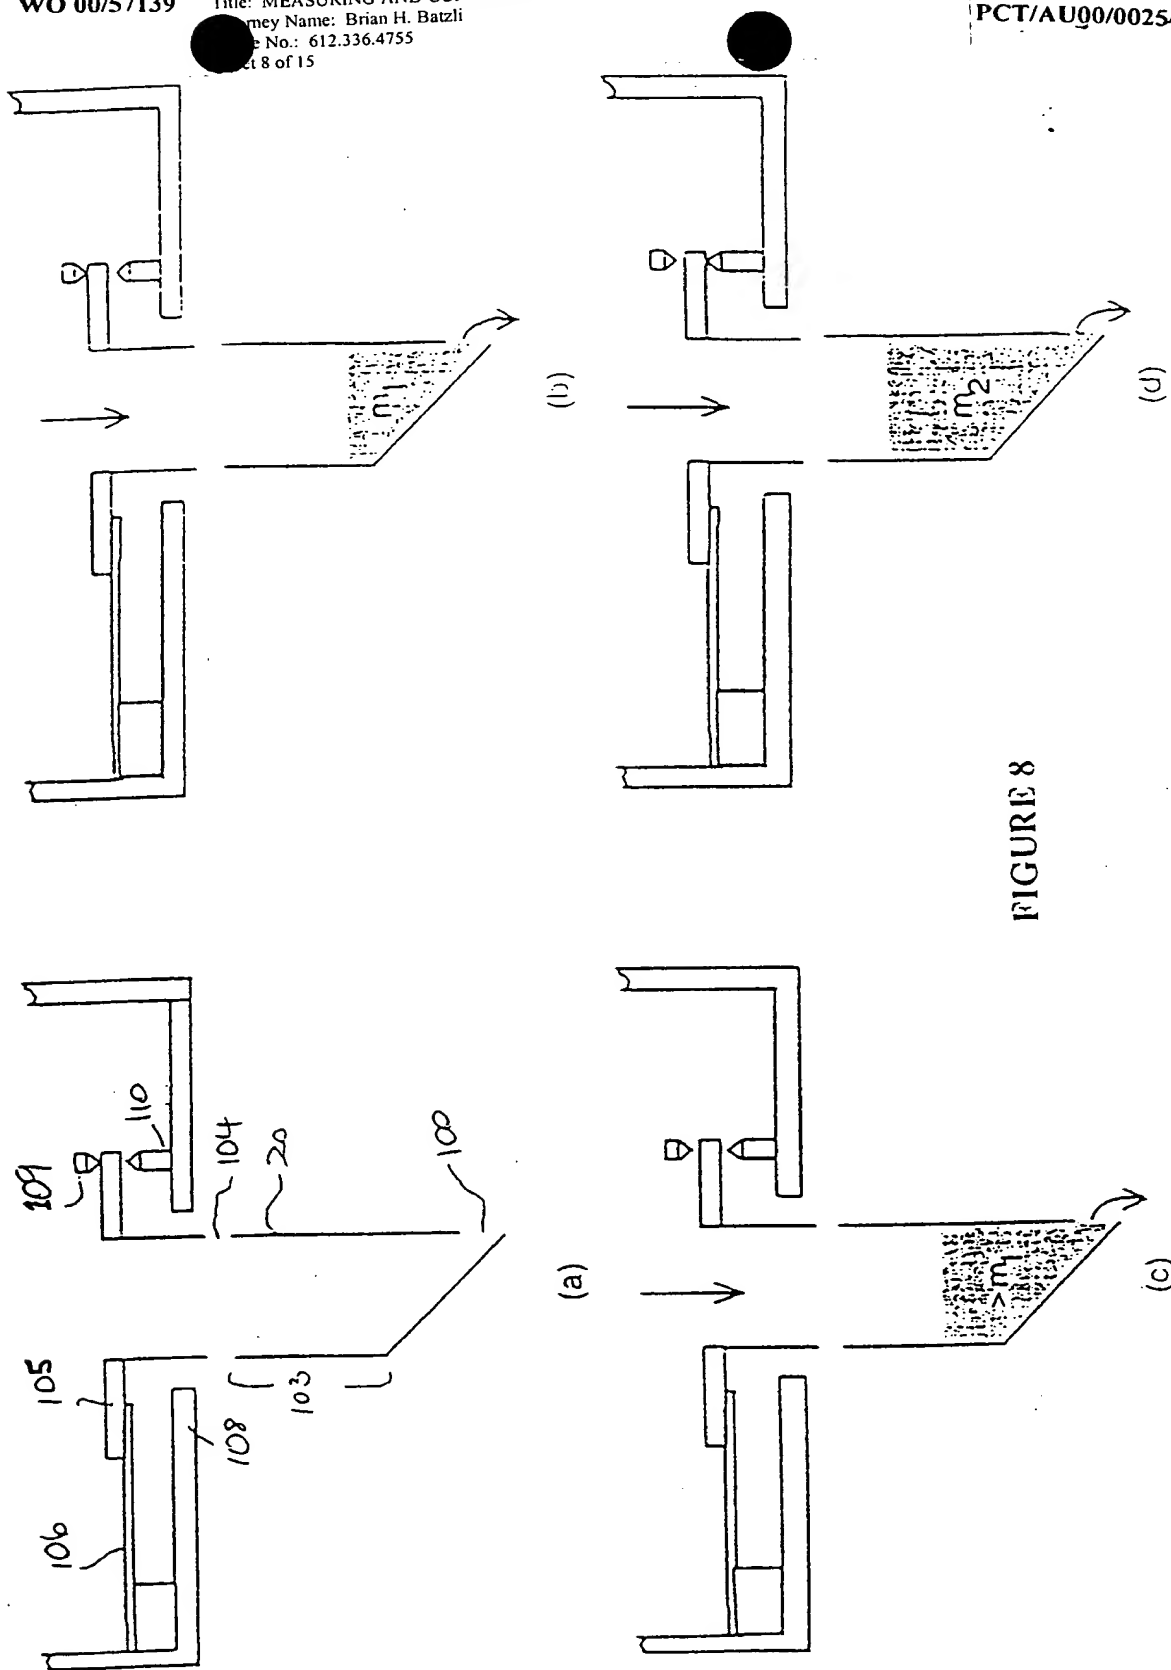


FIGURE 7





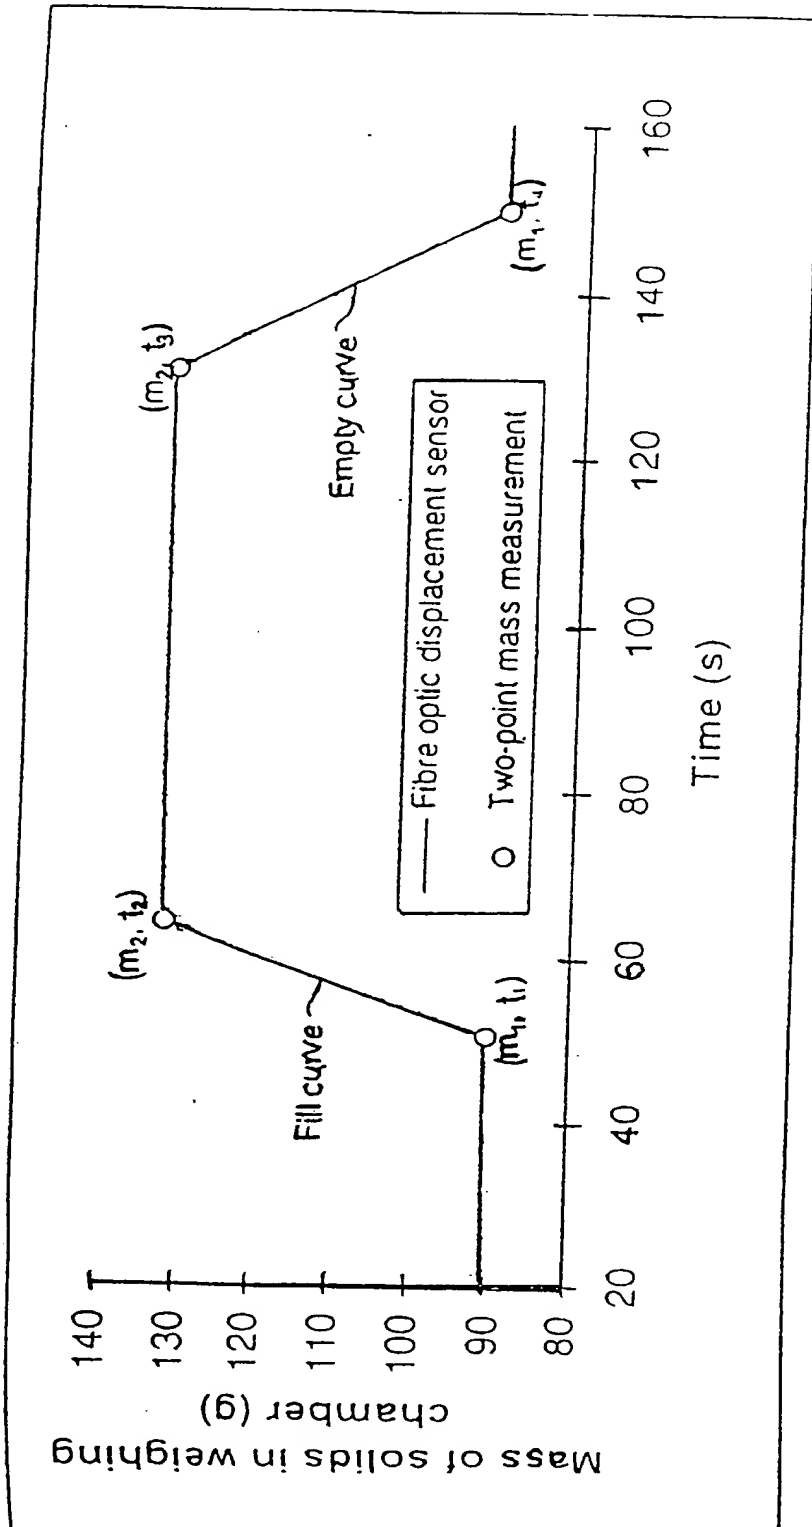


FIGURE 9

10/15

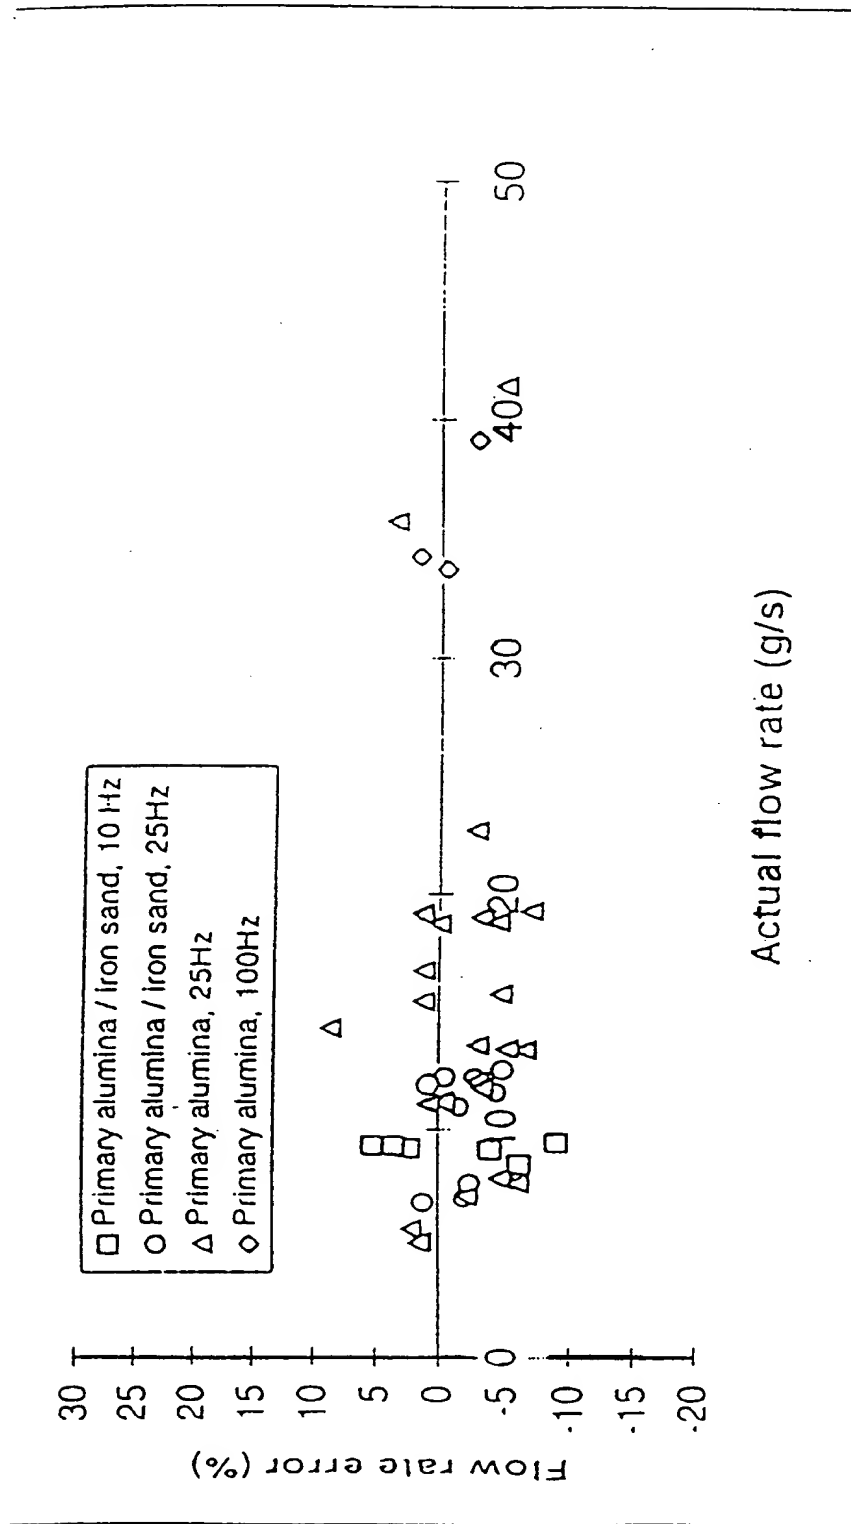


FIGURE 10

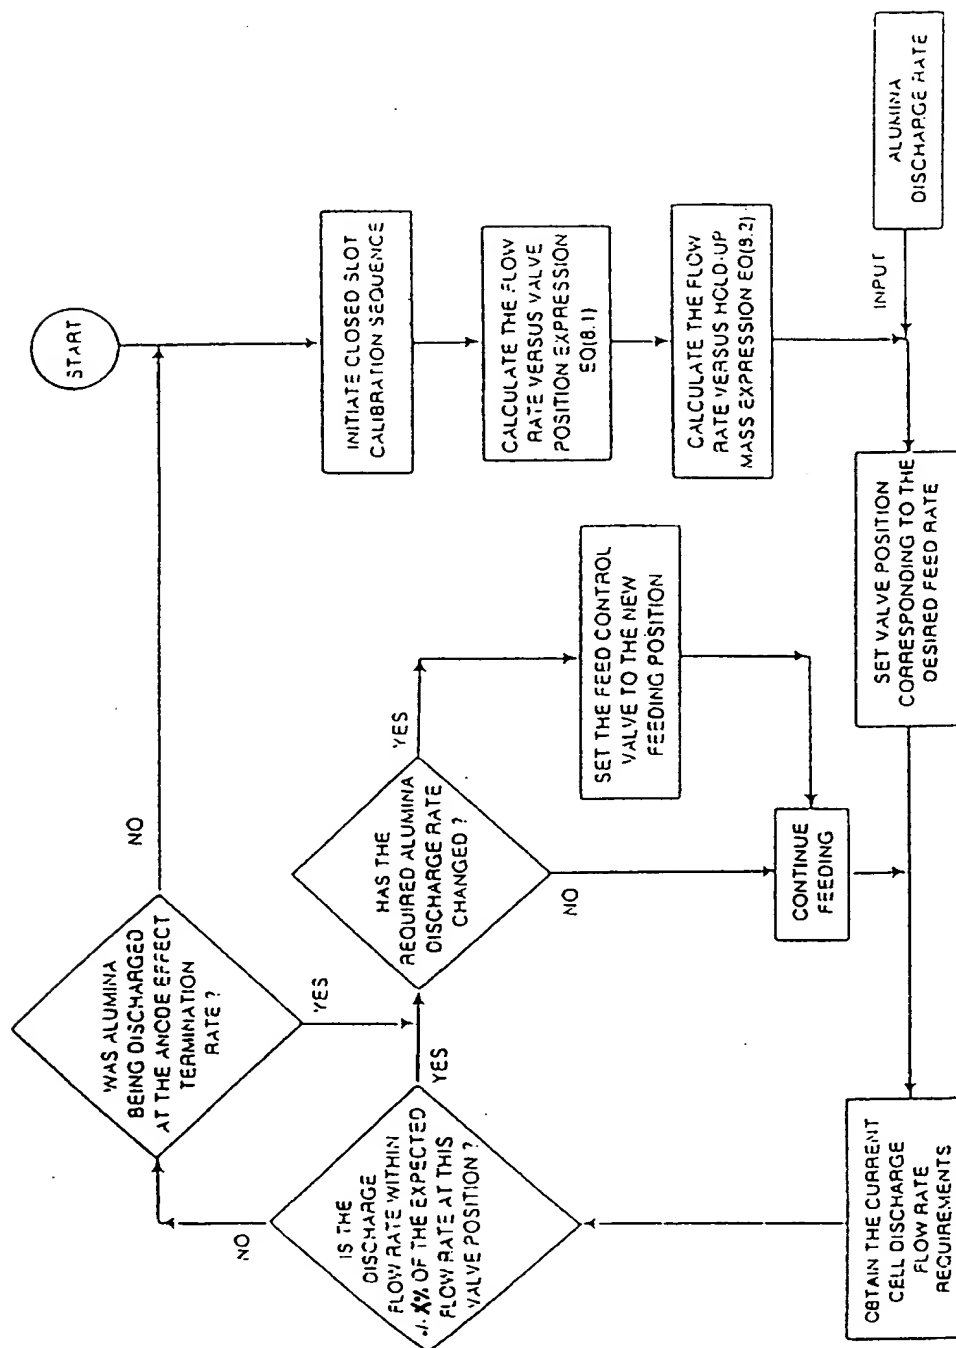


FIGURE 11

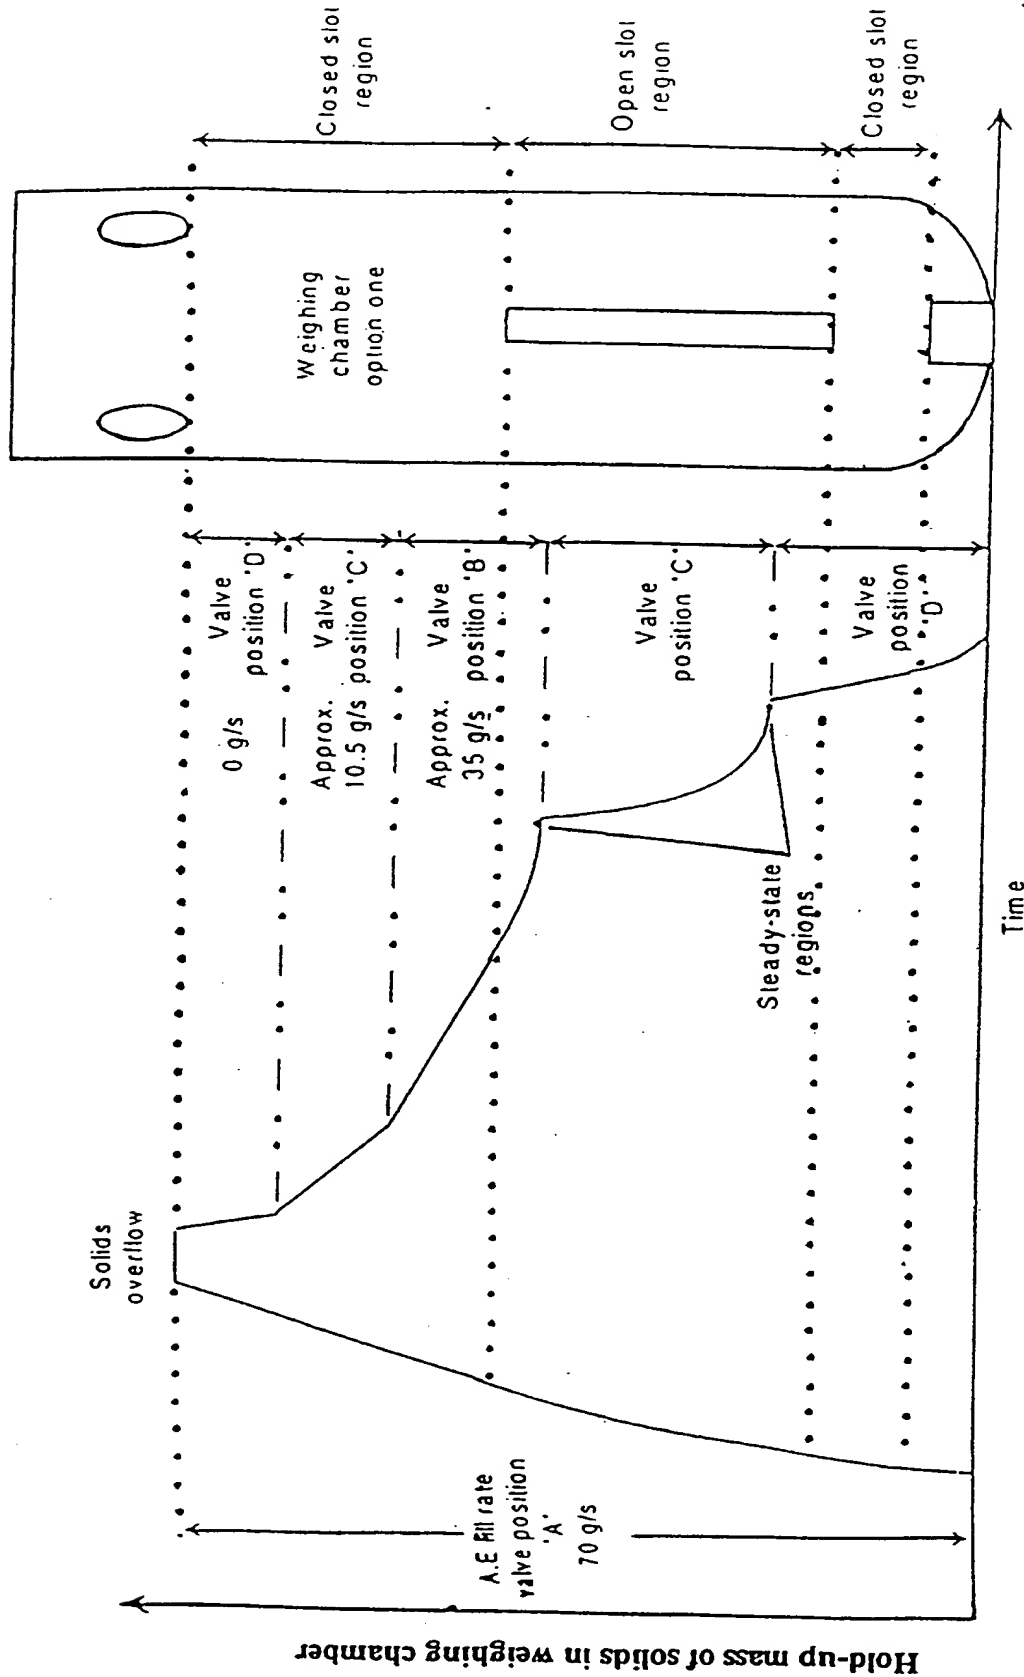


FIGURE 12

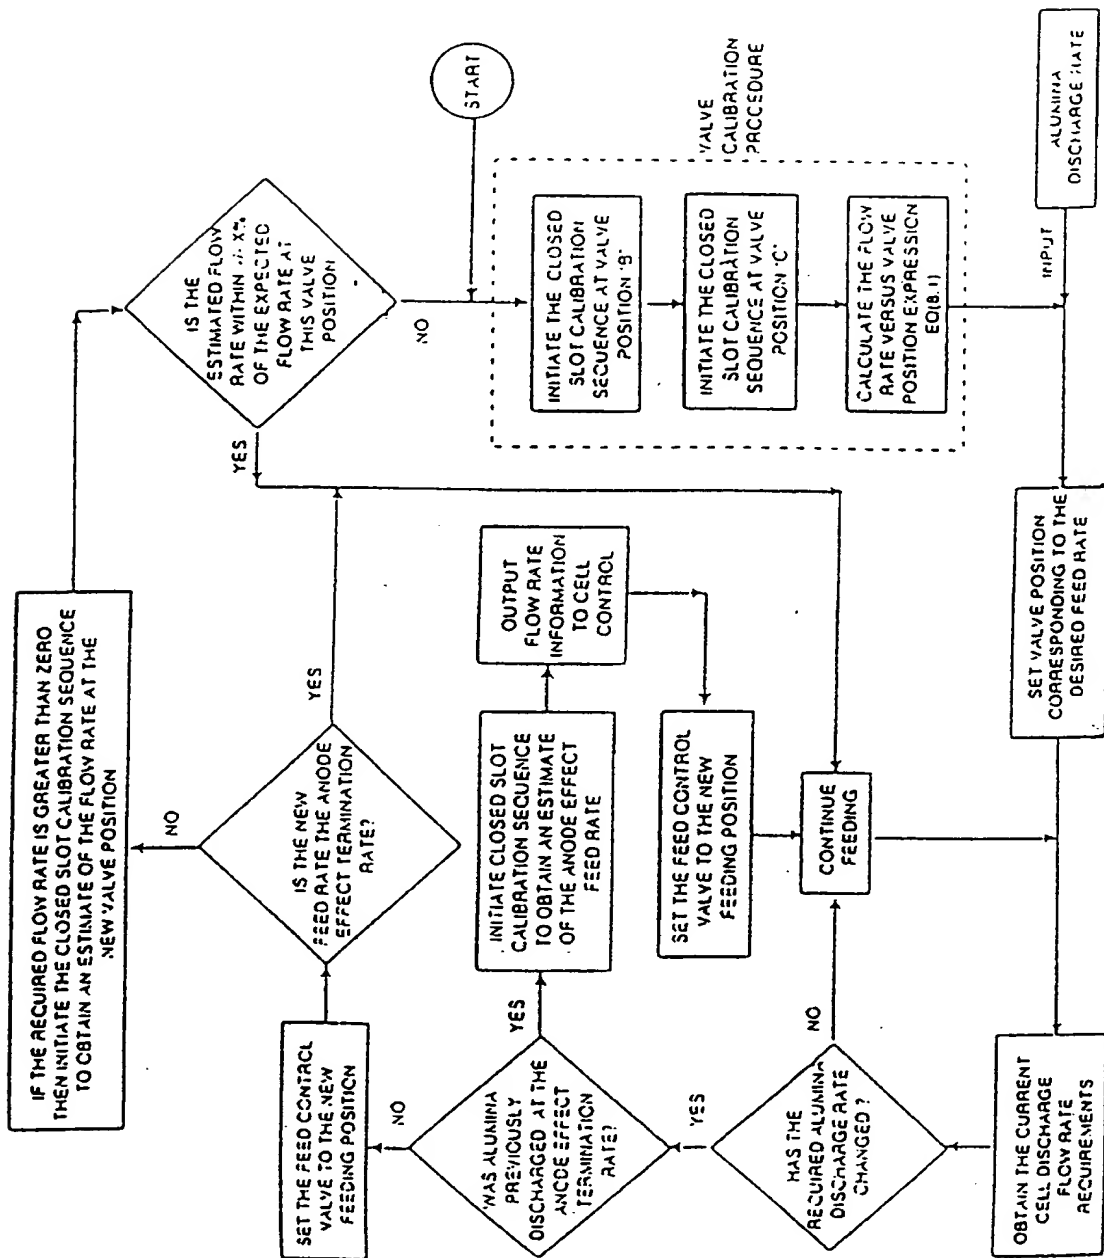


FIGURE 13

14/15

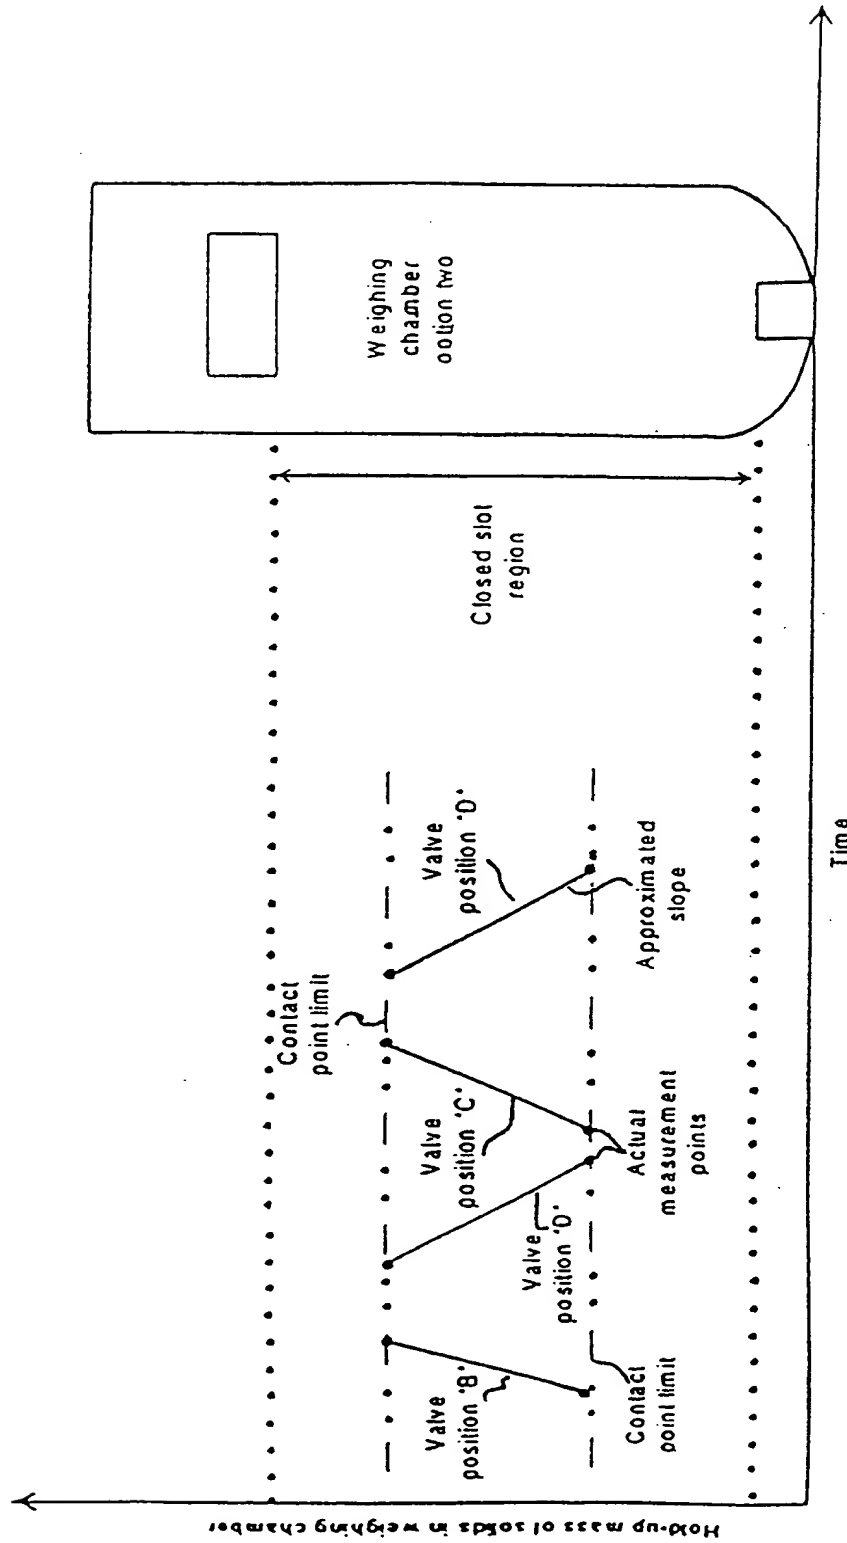


FIGURE 14



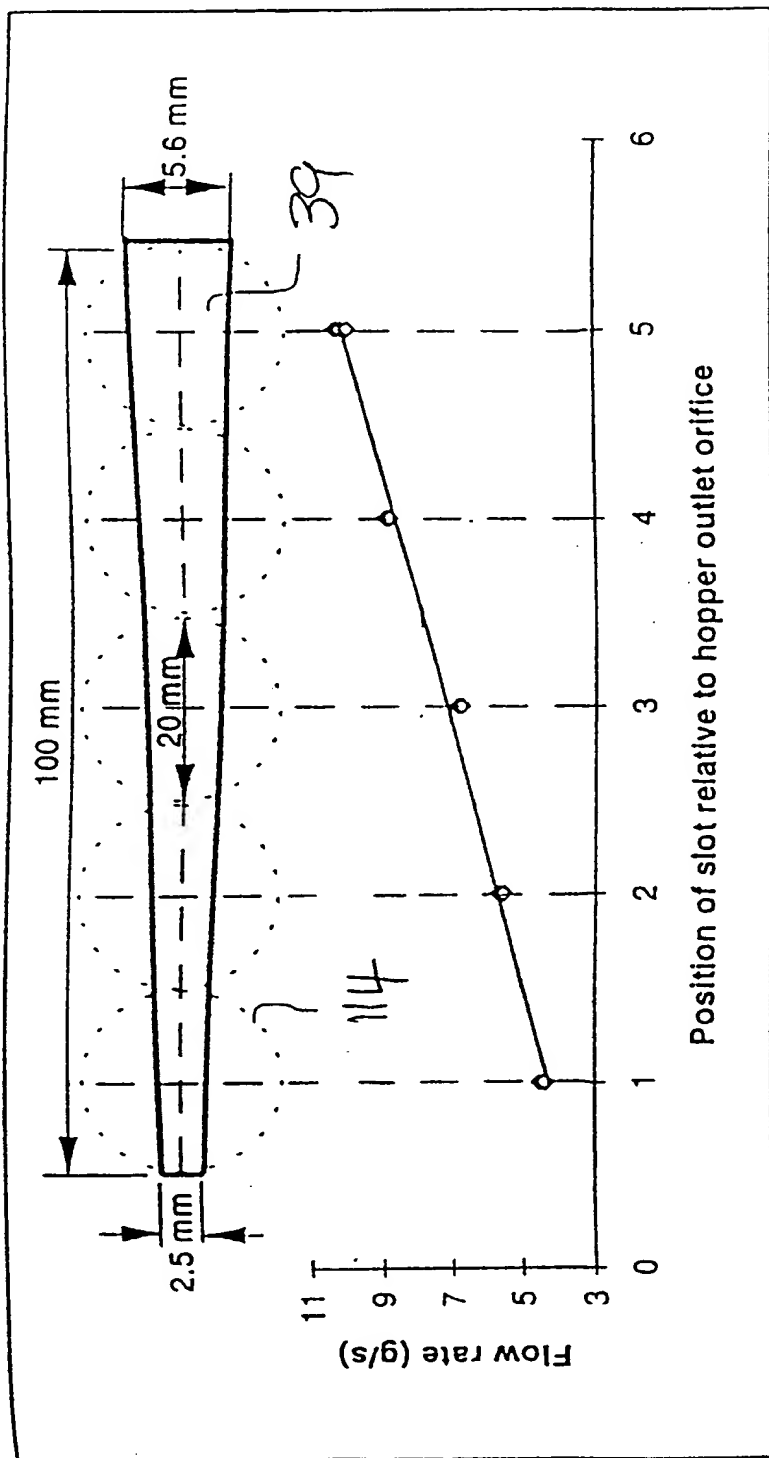


FIGURE 15

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU00/00254

**A. CLASSIFICATION OF SUBJECT MATTER**Int. Cl. <sup>7</sup>: G01F 1/76 1/78 25/00

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

G01F 1/00 1/76 1/78 25/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPAT using IPC and keywords: mass, aperture#, slot#, hole#, opening#, orifice#, passage#, outlet#

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 576 499 A (DAVIES) 19 November 1996 column 2 line 45 to column 4 line 64	1
A	GB 2 241 789 A (HER MAJESTY THE QUEEN IN RIGHT OF NEW ZEALAND DSIR INDUSTRIAL DEVELOPMENT) 11 September 1991 whole document	1
A	DE 39 23 653 (FREDE) 24 January 1991 abstract	1

☐

Further documents are listed in the continuation of Box C

☐

See patent family annex

\* Special categories of cited documents:

"A" document defining the general state of the art which is  
not considered to be of particular relevance"E" earlier application or patent but published on or after  
the international filing date"L" document which may throw doubts on priority claim(s)  
or which is cited to establish the publication date of  
another citation or other special reason (as specified)"O" document referring to an oral disclosure, use,  
exhibition or other means"P" document published prior to the international filing  
date but later than the priority date claimed

"T"

later document published after the international filing date or  
priority date and not in conflict with the application but cited to  
understand the principle or theory underlying the invention

"X"

document of particular relevance; the claimed invention cannot  
be considered novel or cannot be considered to involve an  
inventive step when the document is taken alone

"Y"

document of particular relevance; the claimed invention cannot  
be considered to involve an inventive step when the document is  
combined with one or more other such documents, such  
combination being obvious to a person skilled in the art

"&amp;"

document member of the same patent family

Date of the actual completion of the international search

17 May 2000

Date of mailing of the international search report

13.06.2000

Name and mailing address of the ISA/AU

AUSTRALIAN PATENT OFFICE  
PO BOX 200, WODEN ACT 2606, AUSTRALIA  
E-mail address: pct@ipaustalia.gov.au  
Facsimile No. (02) 6285 3929

Authorised officer

ROSS BURDON

Telephone No : (02) 6283 2605

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU00/00254

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 36 17 595 A (FREDE) 26 November 1987 abstract	1
A	EP 0 834 723 A (EMERSON ELECTRIC COMPANY) 6 April 1998 whole document	24, 28
A	WO 94/05980 A (TRU-TEST LIMITED) 17 March 1994 whole document	24, 28